

HAVIT SAE 45° flange adapter BSP-60° WFG

Supplied with two flange halves, screw set and O-ring.




Characteristics

Series: WFG

Flange type: SAE 45° flange adapter

Material: Steel

Thread form: BSP 60° cone

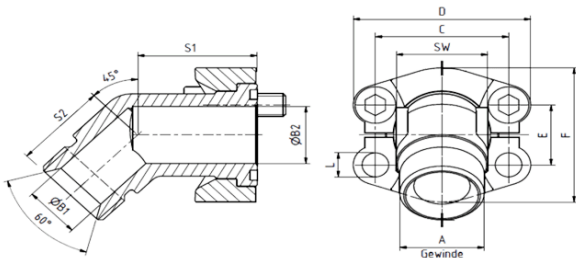

Size table:

Pressure class	SAE flange size	A	B1	B2	C	D	E	F	L
psi	in	mm	mm	mm	mm	mm	mm	mm	mm
3000	3/4	G 3/4"	16.7	19	47.6	65	22.2	52	10.5
3000	3/4	G 1"	22.2	25	52.4	70	26.2	59	10.5
3000	1.1/4	G 1.1/4"	28.6	27	58.7	79	30.2	73	10.5
3000	1.1/2	G 1.1/2"	33.3	36	69.9	94	35.7	83	13.3
6000	1/2	G 1/2"	11.1	12	40.5	56.4	18.2	47.8	8.5
6000	3/4	G 3/4"	16.7	17	50.8	71	23.8	61	10.5
6000	1	G 1"	22.2	24	57.2	81	27.8	70	13.3
6000	1.1/4	G 1.1/4"	28.6	31	66.7	95	31.8	78	13.3
6000	1.1/2	G 1.1/2"	33.3	36	79.4	113	36.5	95	16.8

Pressure class	SAE flange size	Surface protection	Thread size	Max. operation pressure	Article
psi	in			bar	
3000	3/4	Untreated	G 3/4"	350	14312702
3000	3/4	Untreated	G 3/4"	350	14312794
3000	1.1/4	Untreated	G 1.1/4"	250	14312925
3000	1.1/4	Untreated	G 1.1/4"	250	14312928
3000	1.1/2	Untreated	G 1.1/2"	200	14313031
6000	1/2	Untreated	G 1/2"	420	14313091
6000	3/4	Untreated	G 3/4"	420	14313156
6000	1	Untreated	G 1"	420	14313222
6000	1.1/4	Untreated	G 1.1/4"	420	14313297
6000	1.1/2	Untreated	G 1.1/2"	420	14313363

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.