



HAVIT SAE 90° flange adapter JIC 37° WFG

Supplied with two flange halves, screw set and O-ring.

Characteristics

Series: WFG


Flange type: SAE 90° flange adapter

Material: Steel

Thread form: JIC 37° cone

Size table:


Pressure class	SAE flange size	A	B1	B2	C	D	E	F1	F2
psi	in		mm	mm	mm	mm	mm	mm	mm
3000	1/2	3/4-16 UNF	9.9	13	38.1	54	17.5	60.8	46
3000	1/2	7/8-14 UNF	12.3	13	38.1	54	17.5	60.8	46
3000	3/4	1.1/16-12 UN	15.5	19	47.6	65	22.3	70.9	52
3000	3/4	1.5/16-12 UN	21.5	19	47.6	65	22.3	70.9	52
3000	3/4	7/8-14 UNF	12.3	19	47.6	65	22.3	70.9	52
3000	1	1.1/16-12 UN	15.5	24	52.4	70	26.2	79.2	59
3000	1	1.5/16-12 UN	21.5	25	52.4	70	26.2	79.2	59
3000	1	1.5/8-12 UN	27.5	25	52.4	70	26.2	79.2	59
3000	1.1/4	1.5/16-12 UN	21.5	24	58.7	79	30.2	85.3	73
3000	1.1/4	1.5/8-12 UN	27.5	31	58.7	79	30.2	85.3	73
3000	1.1/2	1.5/8-12 UN	27.5	38	69.9	94	35.7	117.1	83
3000	1.1/2	1.7/8-12 UN	33	38	69.9	94	35.7	117.1	83
6000	1/2	3/4-16 UNF	9.9	13	40.5	56	18.2	61.6	48
6000	1/2	7/8-14 UNF	12.3	13	40.5	56	18.2	61.6	48
6000	3/4	1.1/16-12 UN	15.5	17	50.8	71	23.8	78	60
6000	1	1.1/16-12 UN	15.5	24	57.2	81	27.8	99	70
6000	1	1.5/16-12 UN	21.5	24	57.2	81	27.8	99	70
6000	1	1.5/8-12 UN	27.5	24	57.2	81	27.8	99	70

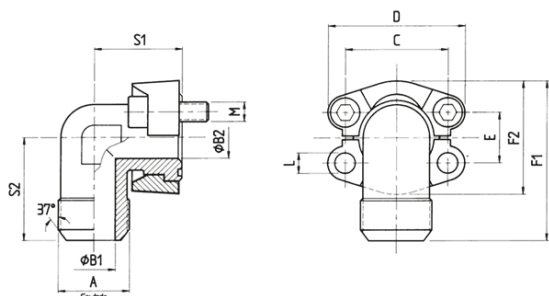

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Size table:

Pressure class	SAE flange size	A	B1	B2	C	D	E	F1	F2
6000	1.1/4	1.5/16-12 UN	21.5	31	66.6	95	31.8	115.5	78
6000	1.1/4	1.5/8-12 UN	27.5	31	66.6	95	31.8	115.5	78
6000	1.1/4	1.7/8-12 UN	33	30	66.6	95	31.8	115.5	78
6000	1.1/2	1.5/8-12 UN	27.5	32	79.3	113	36.5	133	95
6000	1.1/2	1.7/8-12 UN	33	36	79.3	113	36.5	133	95

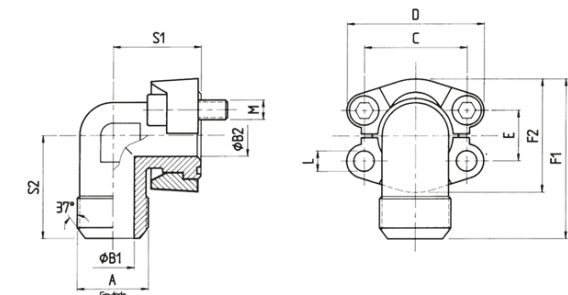

Pressure class psi	SAE flange size in	Surface protection	Thread size	Max. operation pressure bar	Article
3000	1/2	Untreated	3/4-16 UNF	350	14312657
3000	1/2	Untreated	7/8-14 UNF	350	14312661
3000	3/4	Untreated	1.1/16-12 UN	350	14312746
3000	3/4	Untreated	1.5/16-12 UN	350	14312750
3000	3/4	Untreated	7/8-14 UNF	350	14312754
3000	1	Untreated	1.1/16-12 UN	320	14312835
3000	1	Untreated	1.5/16-12 UN	320	14312841
3000	1	Untreated	1.5/8-12 UN	320	14312845
3000	1.1/4	Untreated	1.5/16-12 UN	280	14312979
3000	1.1/4	Untreated	1.5/8-12 UN	280	14312983
3000	1.1/2	Untreated	1.5/8-12 UN	210	14313064
3000	1.1/2	Untreated	1.7/8-12 UN	210	14313068
6000	1/2	Untreated	3/4-16 UNF	420	14313121
6000	1/2	Untreated	7/8-14 UNF	420	14313126
6000	3/4	Untreated	1.1/16-12 UN	420	14313196
6000	1	Untreated	1.1/16-12 UN	420	14313256
6000	1	Untreated	1.5/16-12 UN	420	14313260
6000	1	Untreated	1.5/8-12 UN	420	14313265
6000	1.1/4	Untreated	1.5/16-12 UN	420	14313339
6000	1.1/4	Untreated	1.5/8-12 UN	420	14313333
6000	1.1/4	Untreated	1.7/8-12 UN	420	14313337
6000	1.1/2	Untreated	1.5/8-12 UN	420	14313391
6000	1.1/2	Untreated	1.7/8-12 UN	420	14313395

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.