


ECON® Glass tube thermometer fig. 1654 plastic small size model

Characteristics

Type: 1654 Model: Small (110 mm) Construction type: Straight Connection location: Below Process connection: External thread Housing material: Plastic Max. operating pressure: 16 bar

Application

• Recommended in: Machine Construction, Utilities

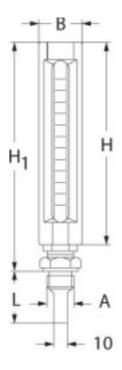

Size table:

| L | G | В | ØD | н | HI |
|--------------|------|----|----|-----|-----|
| mm | | mm | mm | mm | mm |
| 40 - 50 - 63 | 1/2" | 36 | 10 | 110 | 130 |

| Measuring range | Size process connection | Insert length | Process connection material | TMA - maximum allowable temperature | Article |
|-----------------|-------------------------|---------------|--------------------------------|--|----------|
| °C | | mm | | °C | |
| 0 / 120 | 1/2" BSPP(G) | 40 | Brass | 120 | 12725760 |
| 0 / 120 | 1/2" BSPP[G] | 50 | Brass | 120 | 12725761 |
| 0 / 120 | 1/2" BSPP[G] | 63 | Brass | 120 | 12725762 |

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Page 1/1

