



ECON® Bellow sealed valve Type: 430 Cast iron Flange PN16

ECON® cast iron bellow sealed globe valve, SS trim, double bellow, straight pattern, flanged connection, outside screw & yoke, non-rising hand wheel.

Area of application


General industry, power stations, flue gas purification plant, heating technology, ammonia plants, vacuum facilities.

Characteristics

Type: 430
Norm: EN (DIN)
Construction type: Straight
Housing material: Cast iron
Surface protection: Standard manufacturers coating
Connection: Flange
Flange finish: Raised face
Stem seal type: Bellows
Material disc: 1.4021+QT
Spindle material: 1.4021
Primary spindle seal material: Graphite
Bellows material: 1.4571
Material bonnet: EN-JS1049

Characteristics [2]

Bonnet gasket material: Stainless steel/graphite
Actuator material: Steel
Minimum medium temperature (continuous): -10 °C
Maximum medium temperature (continuous): 300 °C
Maximum pressure difference at 20 °C: 16 bar
With position indicator: Yes

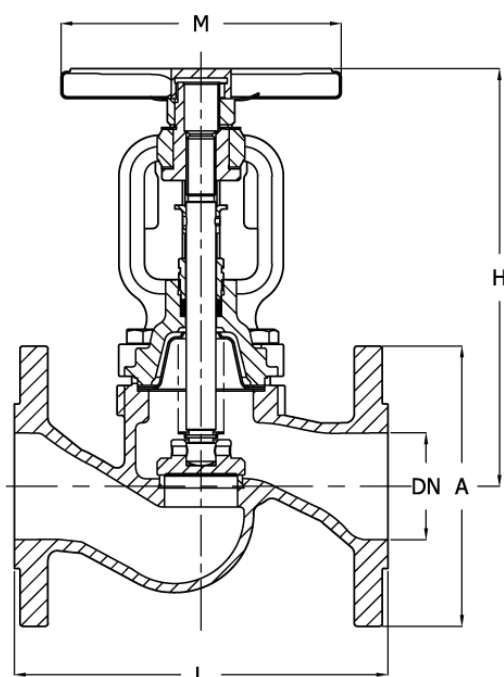

Size table:

DN	A mm	H mm	L mm	M mm	Weight kg
DN15	95	178	130	125	3.2
DN20	105	178	150	125	3.9
DN25	115	193	160	125	4.85
DN32	140	201	180	125	6.5
DN40	150	224	200	150	9
DN50	165	228	230	150	11
DN65	185	270	290	175	15.8
DN80	200	295	310	200	24.3
DN100	220	325	350	250	35
DN125	250	380	400	300	49
DN150	285	427	480	400	76
DN200	340	569	600	500	130.5

Pressure and temperature range

Pressure rating	-10/120	150	200	250	300	350	[°C]
PN16	16	14.4	12.8	11.2	9.6	0	[bar]

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Material quality	Nominal inner diameter	Pressure rating	Face to Face norm	Face to Face length mm	Operation	Type of disc	Type of bonnet	Sealing	Kv value m³/h	Article
EN-JL1040	DN15	PN16	EN 558, Series 1	130	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	5.9	13254034
EN-JL1040	DN20	PN16	EN 558, Series 1	150	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	7.4	13288282
EN-JL1040	DN25	PN16	EN 558, Series 1	160	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	13	13287164
EN-JL1040	DN32	PN16	EN 558, Series 1	180	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	18	13288283
EN-JL1040	DN40	PN16	EN 558, Series 1	200	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	30	13295502
EN-JL1040	DN50	PN16	EN 558, Series 1	230	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	41	13288284
EN-JL1040	DN65	PN16	EN 558, Series 1	290	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	79	13288285
EN-JL1040	DN80	PN16	EN 558, Series 1	310	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	115	13278398
EN-JL1040	DN100	PN16	EN 558, Series 1	350	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	181	13288286
EN-JL1040	DN125	PN16	EN 558, Series 1	400	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	225	13288287
EN-JL1040	DN150	PN16	EN 558, Series 1	480	Hand wheel, non-rising with rising stem	Fixed disc	Bolted bonnet	Stainless steel	364	13288288
EN-JL1040	DN200	PN16	EN 558, Series 1	600	Hand wheel, non-rising with rising stem	Balanced valve	Bolted bonnet	Stainless steel	725	13288289

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.