



ECON® Ball valve Type: 7257 Steel Fire safe Flange Class 300



Characteristics

Type: 7257
Norm: ASME
Construction type: 2-way
Housing construction: 2-part
Housing material: Steel
Material quality: ASTM A216 WCB
Surface protection: Acrylic polyurethane
Connection: Flange
Flange finish: Raised face
Top flange standard: ISO 5211 Direct Mount
Seat material: TFM 1600
Spindle material: ASTM A276 316
Primary spindle seal material: PTFE
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: Graphite
Body seal: SWG 316L/PTFE/Graphite
Minimum medium temperature (continuous): -10 °C
Maximum medium temperature (continuous): 200 °C
Maximum operating pressure [Bar]: 51 bar
Fire safe: Yes

Application

- Industrial applications up to 51 bar.
- Liquid and gaseous media.

Technical Information

- Flanged connection in accordance with ASME B16.5 RF.
- Floating ball.
- ASME pressure rating: class 300.
- With direct-mount top flange in accordance with ISO 5211.
- Media temperature: -10/+200°C.
- Acrylic polyurethane coating in RAL5015.
- ½" to 3" with lever and locking device.
- 4" to 6" with T-bar.
- 8" without control as standard.

Construction


- Two-piece housing construction.
- Design according to ASME B16.34.
- Full bore.
- With anti-static design between ball and housing.
- Face-to-face dimension according to ASME B16.10: long pattern.

Approval

- Fugitive emission certified in accordance with TA-Luft VDI 2440 / VDI 3479.
- Fugitive emission certified in accordance with ISO 15848-1 BH-CO1 and CH-CO3.
- Fire-safe approval in accordance with ISO 10497 and API 607, sixth edition.
- Safety integrity level IEC 61508 SIL 2.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manually actuated or automated valves.
- Available with seats in TF4215.
- Stainless steel extended spindle type 8007 for insulation.

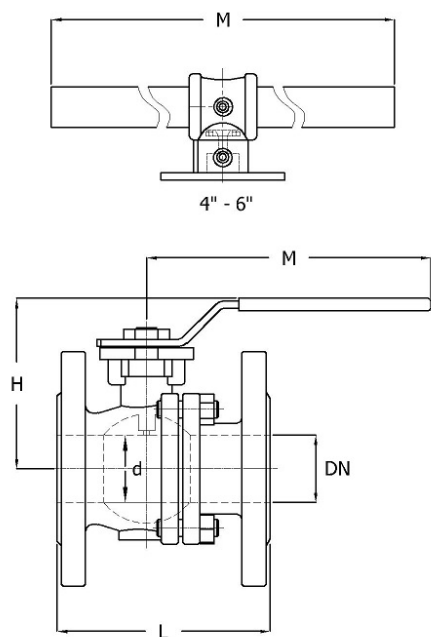

Size table:

DN	d mm	L mm	H mm	M mm	Weight kg
1/2" [15]	15	140	79	145	2.4
3/4" [20]	20	152	89	145	3.2
1" [25]	25	165	94.5	175	4.2
1.1/2" [40]	38	190	110	190	6.9
2" [50]	50	216	115	190	9.5
3" [80]	76	282	176	265	17.7
4" [100]	100	305	204	400	25.2
6" [150]	150	403	275.5	800	73.8
8" [200]	200	502	328		171

Pressure and temperature range						
DN	-10	38	93	149	200	[°C]
1/2" - 1"	51	48	41	37	16	[bar]
1.1/2" - 2"	51	48	41	32	15	[bar]
3" - 4"	51	48	41	27	11	[bar]
6" - 8"	51	48	35	18	4	[bar]

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Material ball	Actuator material	Article
1/2" [15]	Class 300	ASME B16.10, T2, Serie 7	Handle	F03	F04	Full bore	Yes	ASTM A351 CF8M	1.4301	13305474
3/4" [20]	Class 300	ASME B16.10, T2, Serie 7	Handle	F03	F04	Full bore	Yes	ASTM A351 CF8M	1.4301	13305475
1" [25]	Class 300	ASME B16.10, T2, Serie 7	Handle	F04	F05	Full bore	Yes	ASTM A351 CF8M	1.4301	13305476
1.1/2" [40]	Class 300	ASME B16.10, T2, Serie 7	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	13305477
2" [50]	Class 300	ASME B16.10, T2, Serie 7	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	13305478
3" [80]	Class 300	ASME B16.10, T2, Serie 7	Handle	F07	F10	Full bore	Yes	ASTM A351 CF8M	1.4301	13305479
4" [100]	Class 300	ASME B16.10, T2, Serie 7	T-wrench	F10		Full bore	No	ASTM A351 CF8M	Steel, galvanized	13305480
6" [150]	Class 300	ASME B16.10, T2, Serie 7	T-wrench	F12		Full bore	No	ASTM A351 CF8M	Steel, galvanized	13305481
8" [200]	Class 300	ASME B16.10, T2, Serie 7	Bare stem	F14		Full bore	No	ASTM A351 CF8M		14463306

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.