

ECON® Ball valve Type: 7297 Stainless steel Fire safe Flange Class 300



Characteristics

Type: 7297

Norm: ASME

Construction type: 2-way

Housing construction: 2-part

Housing material: Stainless steel

Material quality: ASTM A351 CF8M

Connection: Flange

Flange finish: Raised face

Top flange standard: ISO 5211 Direct Mount

Seat material: TFM 1600

Spindle material: ASTM A276 316

Primary spindle seal material: PTFE

Secondary spindle seal material: FPM (FKM)

Tertiary spindle seal material: Graphite

Body seal: SWG 316L/PTFE/Graphite

Minimum medium temperature (continuous): -29 °C

Maximum medium temperature (continuous): 200 °C

Maximum operating pressure [Bar]: 51 bar

Fire safe: Yes

Application

- Industrial applications up to 51 bar.
- Liquid and gaseous media.
- Recommended in: Food & Beverages

Technical Information

- Flanged connection in accordance with ASME B16.5 RF.
- Floating ball.
- ASME pressure rating: class 300.
- With direct-mount top flange in accordance with ISO 5211.
- All components intended to come into contact with food comply with EC 1935.
- Media temperature: -29/+200°C.
- ½" to 3" with lever and locking device.
- 4" to 6" with T-bar.
- 8" without control as standard.

Construction


- Two-piece housing construction.
- Design according to ASME B16.34.
- Full bore.
- With anti-static design between ball and housing.
- Face-to-face dimension according to ASME B16.10: long pattern.

Approval

- Fugitive emission certified in accordance with TA-Luft VDI 2440 / VDI 3479.
- Fugitive emission certified in accordance with ISO 15848-1 BH-CO1 and CH-CO3.
- Fire-safe approval in accordance with ISO 10497 and API 607, sixth edition.
- Safety integrity level IEC 61508 SIL 2.
- Declaration of conformity according to EC 1935/2004.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manually actuated or automated valves.
- Available with seats in TF4215.
- Stainless steel extended spindle type 8007 for insulation.

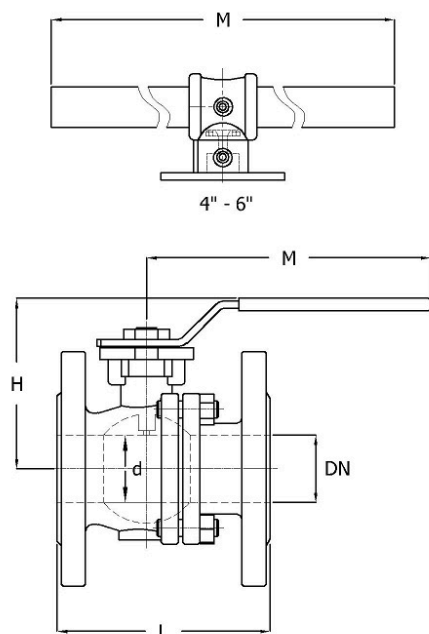

Size table:

DN	d	L	H	M	Weight
	mm	mm	mm	mm	kg
1/2" [15]	15	140	79	145	2.4
3/4" [20]	20	152	89	145	3.2
1" [25]	25	165	94.5	175	4.2
1.1/2" [40]	38	190	110	190	6.9
2" [50]	50	216	115	190	9.5
3" [80]	76	282	176	265	17.7
4" [100]	100	305	204	400	25.2
6" [150]	150	403	275.5	800	73.8
8" [200]	200	502	328		171

Pressure and temperature range						
DN	-29	38	93	149	200	[°C]
1/2" - 1"	51	48	41	37	16	[bar]
1.1/2" - 2"	51	48	41	32	15	[bar]
3" - 4"	51	48	41	27	11	[bar]
6" - 8"	51	48	35	18	4	[bar]

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Material ball	Actuator material	Article
1/2" [15]	Class 300	ASME B16.10, T2, Serie 7	Handle	F03	F04	Full bore	Yes	ASTM A351 CF8M	1.4301	13305501
3/4" [20]	Class 300	ASME B16.10, T2, Serie 7	Handle	F03	F04	Full bore	Yes	ASTM A351 CF8M	1.4301	13305493
1" [25]	Class 300	ASME B16.10, T2, Serie 7	Handle	F04	F05	Full bore	Yes	ASTM A351 CF8M	1.4301	13305494
1.1/2" [40]	Class 300	ASME B16.10, T2, Serie 7	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	13305495
2" [50]	Class 300	ASME B16.10, T2, Serie 7	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	13305496
3" [80]	Class 300	ASME B16.10, T2, Serie 7	Handle	F07	F10	Full bore	Yes	ASTM A351 CF8M	1.4301	13305497
4" [100]	Class 300	ASME B16.10, T2, Serie 7	T-wrench	F10		Full bore	No	ASTM A351 CF8M	Steel, galvanized	13305498
6" [150]	Class 300	ASME B16.10, T2, Serie 7	T-wrench	F12		Full bore	No	ASTM A351 CF8M	Steel, galvanized	13305499
8" [200]	Class 300	ASME B16.10, T2, Serie 7	Bare stem	F14		Full bore	No	ASTM A351 CF8M		14463314

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.