

Globe valve Type: 357 Stainless steel Compression end PN400

Characteristics

Type: 357

Norm: EN (DIN)

Construction type: Straight

Housing material: Stainless steel

Connection: Compression end

Stem seal type: Gland seal

Sealing: Stainless steel

Material disc: 1.4122

Spindle material: 1.4104

Primary spindle seal material: Graphite


Characteristics [2]

Actuator material: Plastic

Minimum medium temperature (continuous): -10 °C

Maximum medium temperature (continuous): 300 °C

Maximum pressure difference at 20 °C: 400 bar

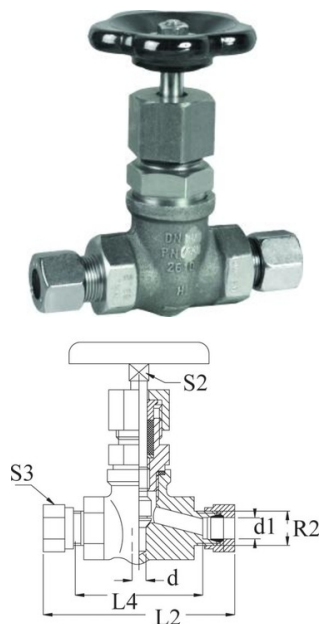

d	d1	H max.	L2	L4	M	R2	S2	S3	Weight
mm	mm	mm	mm	mm	mm	mm	mm	mm	[kg]
10	14	135	125	100	90	M22x1,5	9	27	1,12
12	16	135	125	100	90	M24x1,5	9	30	1,1
16	20	135	130	100	90	M30x2	9	36	1,1
20	25	160	160	130	150	M36x2	9	46	1,76
25	38	170	200	160	150	M42x2	10	60	3,61

Pressure rating		PN200	
Max. oper. pressure		200	[bar]
Min. temperature		-10	[°C]
Max. temperature		300	[°C]

Material quality	Nominal inner diameter	External tube diameter of connection	Nominal bore in DN	Pressure rating	Face to Face norm	Face to Face length	Operation	Type of disc	Type of bonnet	Article
		mm				mm				
1.4021	DN8	12	8	PN400	Manufacturer standard	95	Hand wheel, rising with rising stem	Fixed disc	Screwed	13406340
1.4021	DN10	14	10	PN400	Manufacturer standard	125	Hand wheel, rising with rising stem	Fixed disc	Screwed	13406341
1.4021	DN12	16	12	PN400	Manufacturer standard	125	Hand wheel, rising with rising stem	Fixed disc	Screwed	13406342

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.