



VAG Aerator and vent Type: 21142 PE flange

Polyethylene single-chamber aerator and de-aerator for wastewater applications. The device has been extended to protect the functional parts from contamination. The corrosion-free plastic casing and low weight make maintenance easy.

Characteristics

Series: FLOWJET®

Type: 21142

Model: Aerator and de-aerator

Housing material: PE

Connection: Flange

Maximum pressure at 20 °C: 16 bar

Maximum medium temperature (continuous): 50 °C

Application


- Waste water applications and other contaminated media.

Technical Information

- Dual function, both aeration and venting.
- The minimum pressure required to seal the air-relief valve is 0.1bar.

Options

- For pressures between 0.1 and 1 bar, a version with a special seal is available.
- Seawater-resistant design.

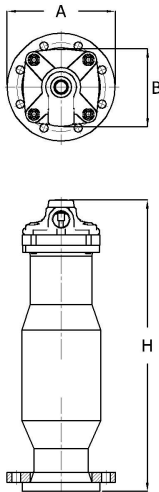

Size table:

DN	Pressure class	A mm	B mm	H mm
DN50	PN16	165	165	290
DN80	PN16	200	200	340
DN100	PN16	220	220	383

Nominal inner diameter	Pressure rating	Article
DN50	PN16	13463326
DN80	PN16	13204649
DN100	PN16	13463327

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.