



ERIKS Pressure blind spade DIN

Pressure blind spades can be used to block parts of a piping system. Pressure spades are pressure-keeping.

Pressure blind spades are also known as spades, paddle spades, paddle blanks, line blanks or pancake blind.

Characteristics

Material: Steel


Material quality: P265-GH

Handle marking: Size, pressure class, material, thickness, marking 'SPADE' and batch number

Execution: Smooth Finish [RA 3,2-6,3] on sealing face of both sides

Size table:


A	C	D	E	T
mm	mm	mm	mm	mm
46	117		25	5
51	114.5		25	5
61	119.5		25	5
71	119.5		25	5
82	124		40	5
92	129		40	6
107	131.5	18	40	8
127	141.5	18	40	8
142	139	18	40	12
162	149	18	60	12
168	146	22	60	12
192	149	18	60	12
194	148	26	60	12
218	161	22	75	14
224	158	26	75	18
273	173.5	22	75	11
273	173.5	22	75	14
284	168	26	75	17
290	165	30	75	22
328	181	22	75	13
329	180.5	26	75	16
340	175	30	75	21
352	169	33	75	27
378	201	22	75	15
384	198	26	75	18
400	190	30	80	24

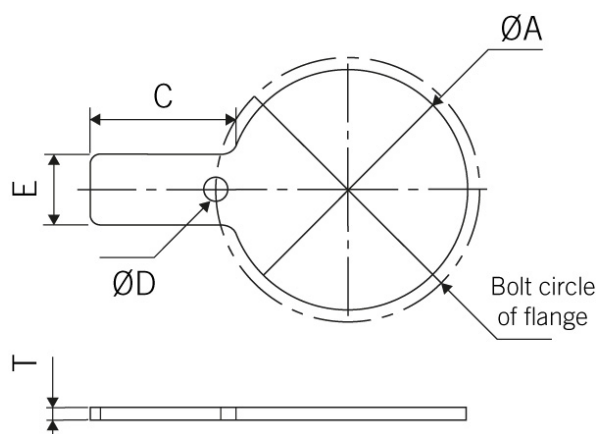

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Size table:

A	C	D	E	T
417	181.5	33	80	31
438	201	22	75	16
444	198	26	75	21
457	191.5	33	80	27
474	183	36	80	35
489	215.5	26	75	18
495	212.5	30	75	23
514	203	36	80	30
546	187	39	80	40
539	190.5	26	75	20
555	182.5	30	75	26
564	178	36	80	32
571	174.5	39	80	41
594	223	26	75	22
617	211.5	33	75	28
624	208	36	80	36
628	206	42	80	45
695	223	30	75	25
734	211.5	36	80	33
731	208	39	80	41
747	206	48	100	53

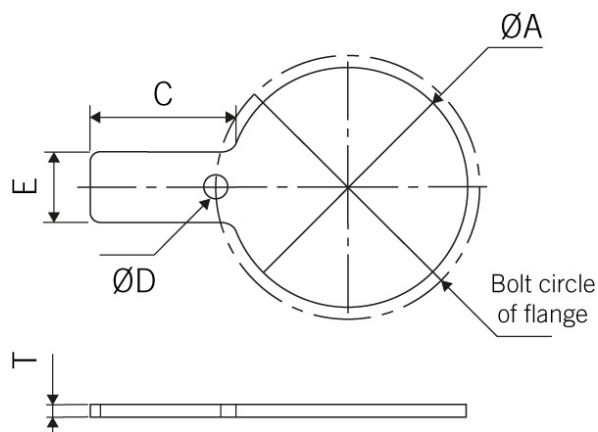

Flange compression stage [PN]	Diameter bolt circle mm	Type of handle	Weight kg	A mm	C mm	D mm	E mm	T mm	Article
10/40		Type 1	0.15	46	117		25	5	13460470
10/40		Type 1	0.15	51	114.5		25	5	13452405
10/40		Type 1	0.21	61	119.5		25	5	13460471
10/40		Type 1	0.28	71	119.5		25	5	13452403
10/40		Type 1	0.38	82	124		40	5	13460472
10/40		Type 1	0.47	92	129		40	6	13460473
10/40	125	Type 2	0.73	107	131.5	18	40	8	13460474
10/40	145	Type 2	1	127	141.5	18	40	8	13460475
10/40	160	Type 2	1.62	142	139	18	40	12	13452392
10/16	180	Type 2	1.99	162	149	18	60	12	13460467
25/40	190	Type 2	1.99	168	146	22	60	12	13460492
10/16	210	Type 2	2.71	192	149	18	60	12	13460468
25/40	220	Type 2	2.71	194	148	26	60	12	13460493
10/16	240	Type 2	4.19	218	161	22	75	14	13460469
25/40	250	Type 2	4.19	224	158	26	75	18	13452391
10	295	Type 2	5.5	273	173.5	22	75	11	13452390
16	295	Type 2	7	273	173.5	22	75	14	13460476
25	310	Type 2	12.4	284	168	26	75	17	13460484
40	320	Type 2	12.4	290	165	30	75	22	13460494
10	350	Type 2	9.2	328	181	22	75	13	13460460

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Flange compression stage (PN)	Diameter bolt circle	Type of handle	Weight	A	C	D	E	T	Article
	mm		kg	mm	mm	mm	mm	mm	
16	355	Type 2	11.4	329	180.5	26	75	16	13460477
25	370	Type 2	21.8	340	175	30	75	21	13460485
40	385	Type 3a	21.8	352	169	33	75	27	13460495
10	400	Type 2	13.8	378	201	22	75	15	13460461
16	410	Type 2	17.1	384	198	26	75	18	13460478
25	430	Type 3a	34.6	400	190	30	80	24	13460486
40	450	Type 3a	34.6	417	181.5	33	80	31	13460496
10	460	Type 2	19.6	438	201	22	75	16	13460462
16	470	Type 2	26.4	444	198	26	75	21	13460479
25	490	Type 3a	30.1	457	191.5	33	80	27	13460487
40	510	Type 3a	30.1	474	183	36	80	35	13460497
10	515	Type 3a	27.3	489	215.5	26	75	18	13460463
16	525	Type 3a	35.7	495	212.5	30	75	23	13460480
25	550	Type 3a	75.3	514	203	36	80	30	13460488
40	585	Type 3a	75.3	546	187	39	80	40	13460498
10	565	Type 3a	36.7	539	190.5	26	75	20	13460464
16	585	Type 3a	50.5	555	182.5	30	75	26	13460481
25	670	Type 3a	84.3	564	178	36	80	32	13460489
40	685	Type 3a	84.4	571	174.5	39	80	41	13460499
10	620	Type 3a	48.8	594	223	26	75	22	13460465
16	650	Type 3a	67	617	211.5	33	75	28	13460482
25	660	Type 3a	111.5	624	208	36	80	36	13460490
40	670	Type 3a	111.5	628	206	42	80	45	13460500
10	725	Type 3a	75.5	695	223	30	75	25	13460466
16	770	Type 3a	111.1	734	211.5	36	80	33	13460483
25	770	Type 3a	184.8	731	208	39	80	41	13460491
40	795	Type 3a	184.8	747	206	48	100	53	13460501

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.