



ADCA Pressure reducing valve Type 1539E series PRV25/2S steel direct-acting internal thread ISO 7/1 Rp



- The ADCA series PRV25/2S pressure reducing valve is equipped with a strainer element and suitable for high capacities due to the construction of the interior. Due to the special construction of the adjustment knob, it is self-locking, which means that the regulator will always remain at the set value.

Reduced pressure ranges: 0.14 - 1.70 bar: Yellow spring.

- 1.40 - 4.00 bar: Green spring.
- 3.50 - 8.60 bar: Red spring.

Where pressure ranges overlap, the best regulation is obtained with the lighter spring.

Characteristics

Series: PRV25/2S

Type: 1539E

Model: Direct-acting

Process connection: Internal thread

Standard connection: ISO 7/1 Rp

Maximum inlet pressure: 17 bar

Min. outlet pressure [bar]: 0.14 bar

PMA - maximum allowable pressure: 25 bar

TMA - maximum allowable temperature: 210 °C

Control ratio: 10:1

Suitable for gases: Yes

Housing material: Steel

Material quality: ASTM A216 WCB/1.0619

Material adjustment knob: PA

Seat material: Stainless steel 316 [1.4401]

Spring material: Stainless steel 302 [1.4300]

Filter element material: Stainless steel SS 304 [1.4301]

Mounting direction: Horizontal

Flow direction: through arrow marking on housing

Approvals: PED 2014/68/EU fluid group 2

Application


- Compressed air.
- Steam.
- Liquids and gases that do not affect the structure.
- With soft PTFE/graphite sealing also suitable for applications with water.

Technical Information

- Installation in horizontal position with the adjustment knob vertically pointing upwards.

Options

- Thread connection ASME B1.20.1; NPT.
- Flange connection EN 1092-1; PN 25.
- Flange connection ASME B16.5; Class #150, #300.
- Valve with soft sealing (graphite/PTFE) for a higher grade of leaktightness, up to a temperature of 180 °C maximum.
- Rising adjustment knob with lock nut.
- Top cap (adjustment screw with cover).
- Spring and dome load version.
- Gauge connection on body.

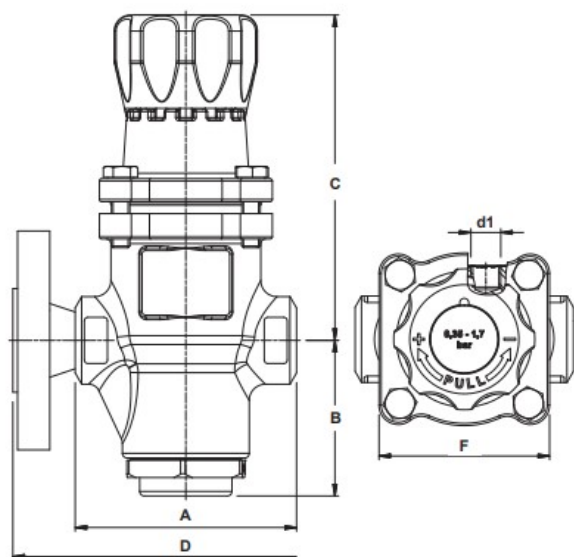

Size table:

Dimension	A mm	B mm	C mm	d1	F mm	Weight kg
1/2" BSP	96	68.5	145	1/4" " [optional]	74	3
1" BSP	96	68.5	145	1/4" " [optional]	74	2.9
3/4" BSP	96	68.5	145	1/4" " [optional]	74	3

Size process connection	Nominal inner diameter	Kvs value m³/h	Reduced pressure range bar	Spring type	PED classification	Article
1/2" BSP	DN15	1.7	0.14 / 1.7	Yellow	PED-SEP	13294474
1/2" BSP	DN15	1.7	3.5 / 8.6	Red	PED-SEP	13291140
1/2" BSP	DN15	1.7	1.4 / 4	Green	PED-SEP	13291849
1" BSP	DN25	3.1	3.5 / 8.6	Red	PED-SEP	13313134
1" BSP	DN25	3.1	0.14 / 1.7	Yellow	PED-SEP	13313102
1" BSP	DN25	3.1	1.4 / 4	Green	PED-SEP	13311072
3/4" BSP	DN20	2.6	0.14 / 1.7	Yellow	PED-SEP	13287263
3/4" BSP	DN20	2.6	3.5 / 8.6	Red	PED-SEP	13305841
3/4" BSP	DN20	2.6	1.4 / 4	Green	PED-SEP	13313135

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.