



ADCA Pressure reducing valve Type 1540E series PRV25/2S steel direct-acting flange EN1092-1



- The ADCA series PRV25/2S pressure reducing valve is equipped with a strainer element and suitable for high capacities due to the construction of the interior. Due to the special construction of the adjustment knob, it is self-locking, which means that the regulator will always remain at the set value.

Reduced pressure ranges: 0.14 - 1.70 bar: Yellow spring.

- 1.40 - 4.00 bar: Green spring.
- 3.50 - 8.60 bar: Red spring.

Where pressure ranges overlap, the best regulation is obtained with the lighter spring.

Characteristics

Series: PRV25/2S

Type: 1540E

Model: Direct-acting

Process connection: Flange

Standard connection: EN 1092-1

Maximum inlet pressure: 17 bar

Min. outlet pressure [bar]: 0.14 bar

PMA - maximum allowable pressure: 25 bar

TMA - maximum allowable temperature: 210 °C

Control ratio: 10:1

Suitable for gases: Yes

Housing material: Steel

Material quality: ASTM A216 WCB/1.0619

Material adjustment knob: PA

Seat material: Stainless steel 316 [1.4401]

Spring material: Stainless steel 302 [1.4300]

Filter element material: Stainless steel SS 304 [1.4301]

Mounting direction: Horizontal

Flow direction: through arrow marking on housing

Approvals: PED 2014/68/EU fluid group 2

Application


- Compressed air.
- Steam.
- Liquids and gases that do not affect the structure.
- With soft PTFE/graphite sealing also suitable for applications with water.

Technical Information

- Installation in horizontal position with the adjustment knob vertically pointing upwards.

Options

- Thread connection ISO / 7 Rp; BSP.
- Thread connection ASME B1.20.1; NPT.
- Flange connection ASME B16.5; Class #150, #300.
- Valve with soft sealing (graphite/PTFE) for a higher grade of leaktightness, upto a temperature of 180 °C maximum.
- Rising adjustment knob with lock nut.
- Top cap (adjustment screw with cover).
- Spring and dome load version.
- Gauge connection on body.

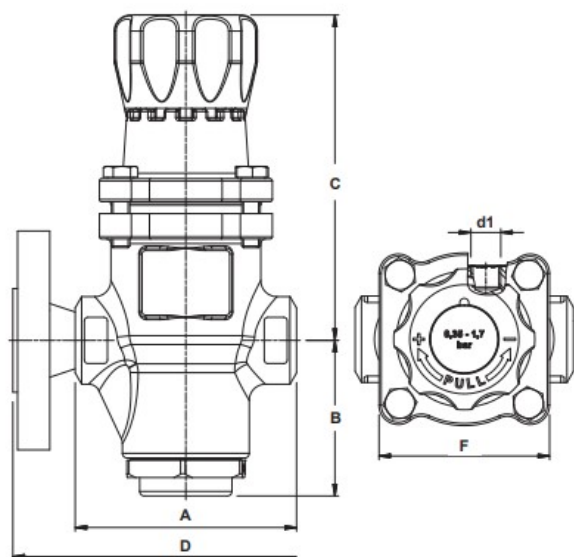

Size table:

Dimension	B mm	C mm	D mm	d1 "	F mm	Weight kg
DN15	68.5	141	150	1/4 " [optional]	74	4.4
DN20	68.5	141	150	1/4 " [optional]	74	5
DN25	68.5	141	160	1/4 " [optional]	74	5.5

Size process connection	Kvs value m³/h	Reduced pressure range bar	Spring type	PED classification	Article
DN15	1.7	0.14 / 1.7	Yellow	PED-SEP	13311064
DN15	1.7	3.5 / 8.6	Yellow	PED-SEP	13313136
DN15	1.7	1.4 / 4	Green	PED-SEP	13291328
DN20	2.6	1.4 / 4	Green	PED-SEP	13313137
DN20	2.6	3.5 / 8.6	Yellow	PED-SEP	13313138
DN20	2.6	0.14 / 1.7	Yellow	PED-SEP	13305696
DN25	3.1	3.5 / 8.6	Yellow	PED-SEP	13276373
DN25	3.1	1.4 / 4	Green	PED-SEP	13313140
DN25	3.1	0.14 / 1.7	Yellow	PED-SEP	13313139

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.