




ASAHI Diaphragm valve Series: 14 Type: 3763 PVC-C Pneumatic operated Single acting, spring closing Flange PN10

Characteristics

Series: 14
Type: 3763
Housing construction: A [Weir type]
Housing material: PVC-C
Connection: Flange
Face to Face norm: EN 558, Series 1
Actuator: Pneumatic operated
Operating principle: Single acting, spring closing

Application

- Recommended in: Chemical

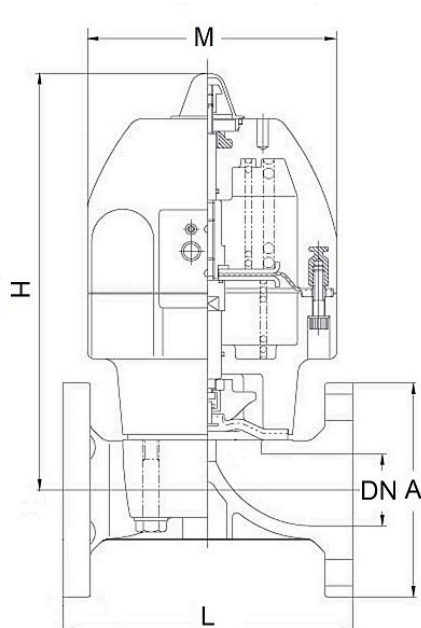

Size table:

DN	A	L	H	M	Weight
	mm	mm	mm	mm	kg
DN15	95	130	186	130	3
DN20	105	150	188	130	3
DN25	115	160	193	130	3
DN32	140	180	197	130	3.5
DN40	150	200	293	174	7
DN50	165	230	302	174	8

Membrane material	External tube diameter of connection	Nominal inner diameter	Pressure rating	Face to Face length	Material bonnet	Actuator material	Minimum medium temperature [continuous]	Maximum medium temperature [continuous]	Kv value	Article
	mm			mm			°C	°C	m³/h	
EPDM	20	DN15	PN10	130	PPG	PPG	-40	120	4.1	13248782
EPDM	25	DN20	PN10	150	PPG	PPG	-40	120	4.6	13248783
EPDM	32	DN25	PN10	160	PPG	PPG	-40	120	7.3	13248784
EPDM	40	DN32	PN10	180	PPG	PPG	-40	120	9.5	13248785
EPDM	50	DN40	PN10	200	PPG	PPG	-40	120	22.5	13248786
EPDM	63	DN50	PN10	230	PPG	PPG	-40	120	37.2	13248787

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.