



Automatic air vent fig. 476 brass external thread

Characteristics


Type: 476
Model: Rapid air vent
Housing material: Brass
Material quality: CW617N
Connection: External thread
Standard connection: ISO 228-1
Sealing: PTFE
Float material: PP
Max. operating pressure: 10 bar
Maximum medium temperature (continuous): 110 °C

Application

- Automatic removal of accumulated air from heating and cooling systems.
- Prevention of corrosion, air pockets and cavitation in circulation pumps.

Technical Information

- Hygroscopic protective cap as additional protection against leakage.
- The automatic shut-off valve ensures easy replacement without water loss.

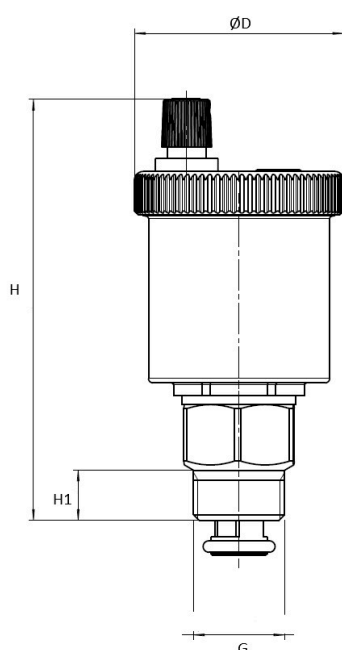

Size table:

G	ØD	H	H1	Weight
	mm	mm	mm	kg
1/2"	48	96.5	11.5	0.23
3/8"	48	96	10	0.21

Connection size	Nominal inner diameter	Pressure rating	Article
1/2" BSPP(G)	DN15	PN10	11811293
3/8" BSPP(G)	DN10	PN10	11811294

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.