



AIRPEL Single filter Type: 6633 Stainless steel Flange

Characteristics

Type: 6633
Norm: EN (DIN)
Housing material: Stainless steel
Connection: Flange
Drain connection: Yes
Material cover gasket: FPM (FKM)
Material drain plug: Stainless steel

Application



- Water
- Oil
- Process fluids
- General industry
- Recommended in: Chemical

Technical Information

- Supplied without filter element
- Horizontal mounting
- Can be used in both suction and delivery piping
- Air vent plug
- Drain plug

Options

- Screens with perforations from 20 microns available
- Horizontal mounting
- Can be used in both suction and delivery piping
- Optionally available with differential pressure display

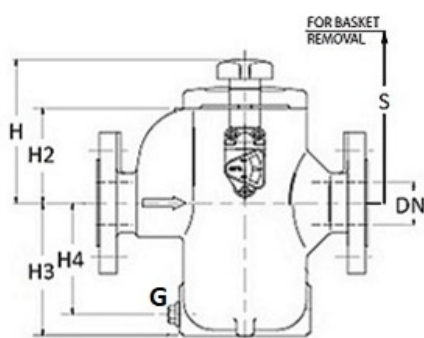

Size table:

DN	H	H2	H3	H4	L	S	G	Weight
	mm	mm	mm	mm	mm	mm		kg
DN25	103	64	105	86	194	220	1/2"	8
DN32	129	90	145	122	210	306	1/2"	12
DN40	129	90	145	122	210	306	1/2"	12
DN50	165	112	156	131	310	351	1/2"	24
DN65	165	112	156	131	310	351	1/2"	25
DN80	198	140	210	186	343	451	1/2"	42
DN100	234	175	265	241	356	575	1/2"	45
DN150	296	218	361	330	480	728	1/2"	107

Nominal inner diameter	Pressure rating	Face to Face length	With filter element	Total filter element surface	Flow direction	Article
		mm		cm ²		
DN25	PN16	194	No	184	Horizontal	10058837
DN32	PN16	210	No	268	Horizontal	11130356
DN40	PN16	210	No	268	Horizontal	10058838
DN50	PN16	310	No	484	Horizontal	10058839
DN65	PN16	310	No	484	Horizontal	11253301
DN80	PN16	343	No	718	Horizontal	10058840
DN100	PN16	356	No	964	Horizontal	10058841
DN150	PN16	480	No	1835	Horizontal	11329620

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.