



## HONEYWELL Pressure reducing valve Type 11188 series D06F-A brass external thread



### Characteristics

**Series:** D06F-A

**Type:** 11188

**Model:** Direct-acting

**Connection:** External thread

**Maximum inlet pressure:** 25 bar

**Medium temperature:** 0 / 40 °C

**Ambient temperature:** 5 / 55 °C

**Suitable for gases:** 0

**Housing material:** Dezincification resistant brass

**Material disc:** Synthetic material

**Seat material:** Synthetic material

**Membrane material:** NBR

**Spring material:** Spring steel

**Material spring bonnet:** Synthetic material

**Filter element material:** Stainless steel

**Filter holder:** Plastic, clear

**Mounting direction:** Horizontal and vertical

**Flow direction:** through arrow marking on housing

**With couplers:** Yes

**Backflow preventer:** No


**Approvals:** DVGW, WRAS

### Application

- Water.
- General industry.

### Technical Information

- Fitted with screening element.
- Balanced valve.
- Three-piece coupling with BSPP outer wire.

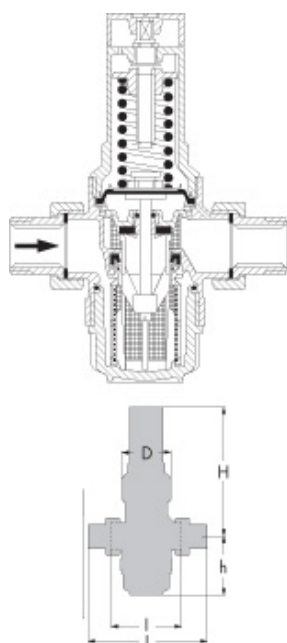

Size table:

| Dimension | D  | h   | H   | I   | L   | Weight |
|-----------|----|-----|-----|-----|-----|--------|
|           | mm | mm  | mm  | mm  | mm  | kg     |
| 1.1/2"    | 82 | 126 | 173 | 130 | 225 | 3.3    |
| 1.1/4"    | 61 | 64  | 111 | 105 | 200 | 2      |
| 1/2"      | 54 | 58  | 89  | 80  | 140 | 0.8    |
| 1"        | 61 | 64  | 111 | 100 | 180 | 1.4    |
| 2"        | 82 | 126 | 173 | 140 | 255 | 4.5    |
| 3/4"      | 54 | 58  | 89  | 90  | 160 | 1      |

| Connection size | Nominal inner diameter | Kvs value<br>m³/h | Reduced pressure range<br>bar | Article  |
|-----------------|------------------------|-------------------|-------------------------------|----------|
| 1.1/2" BSPP(G)  | DN40                   | 12.6              | 1.5 / 6                       | 10051456 |
| 1.1/4" BSPP(G)  | DN32                   | 5.9               | 1.5 / 6                       | 14507699 |
| 1/2" BSPP(G)    | DN15                   | 2.4               | 1.5 / 6                       | 10051454 |

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

| Connection size | Nominal inner diameter | Kvs value<br>m³/h | Reduced pressure range<br>bar | Article  |
|-----------------|------------------------|-------------------|-------------------------------|----------|
| 1" BSPP(G)      | DN25                   | 5.8               | 1.5 / 6                       | 14507700 |
| 2" BSPP(G)      | DN50                   | 12                | 1.5 / 6                       | 14507701 |
| 3/4" BSPP(G)    | DN20                   | 3.1               | 1.5 / 6                       | 10051455 |

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.