



ECON® Bourdon tube pressure gauge Type 1334 rear connection brass

Characteristics

Type: 1334

Model: Bourdon tube pressure gauge

Blow-out included: No

Pressure gauge attachment: Direct

Process connection: External thread

Process connection material: Brass

Window material: Plastic

Material dial: Plastic

Protection class: IP54

Medium temperature: 0 / 60 °C


Ambient temperature: -20 / 60 °C

Application

- Light industry.
- Pneumatics.
- Installation technology.

Technical Information

- Suitable for gases and liquids that do not affect the brass measuring system.
- Measuring ranges according to EN 837-1.

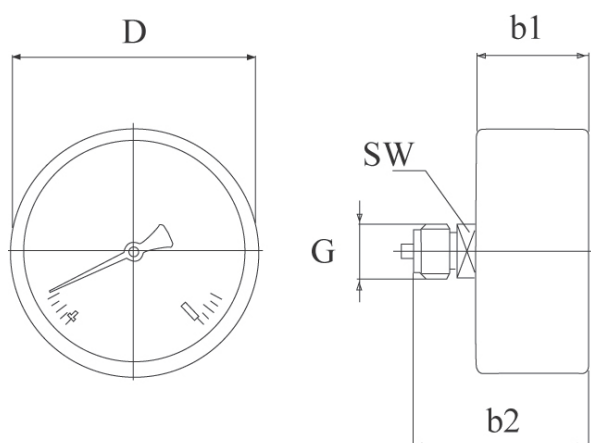

Size table:

Cabinet diameter	G	b1	b2	D	SW	Weight
		mm	mm	mm	mm	kg
R40	1/8"	26	44	40	14	0.07
R40	1/4"	26	44	40	14	0.07
R50	1/4"	27	48	50	14	0.1
R63	1/4"	27	47	63	14	0.15

Cabinet diameter	Measuring range	Pressure unit	Pressure unit secondary scale	Accuracy class	Cabinet filling fluid	Connection location	Size process connection	Cabinet material	Maximum overpressure	Article
mm									bar	
40	-1 / 0	bar		2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	0	11812156
40	0 / 2.5	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	2.5	12937155
40	0 / 4	bar		2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	4	11812159
40	0 / 6	bar		2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	6	11812160
40	0 / 7	bar	psi	2.5 %	None	Back centric	1/8" NPT	Plastic	7	13373689
40	0 / 10	bar		2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	10	11812161
40	0 / 10	bar	psi	2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	10	13373691
40	0 / 10	bar		2.5 %	None	Back centric	1/8" NPT	Plastic	10	13373706
40	0 / 16	bar		2.5 %	None	Back centric	1/8" BSPP[G]	Plastic	16	12571287
50	-1 / 0	bar		2.5 %	None	Back centric	1/4" NPT	Plastic	0	13502496
50	0 / 2.5	bar	psi	2.5 %	None	Back centric	1/4" NPT	Stainless steel 304	2.5	13373709
50	0 / 4	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	4	13373711
50	0 / 6	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	6	13373705
50	0 / 10	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	10	11812166
50	0 / 16	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	16	11812167

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Cabinet diameter	Measuring range	Pressure unit	Pressure unit secondary scale	Accuracy class	Cabinet filling fluid	Connection location	Size process connection	Cabinet material	Maximum overpressure	Article
mm									bar	
63	-1 / 0	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	0	11812168
63	0 / 1	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	1	11812170
63	0 / 1.6	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Stainless steel 304	1.6	11812171
63	0 / 2.5	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Stainless steel 304	2.5	13468070
63	0 / 4	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	4	12262696
63	0 / 6	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	6	11812173
63	0 / 10	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	10	11812174
63	0 / 16	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	16	11812175
63	0 / 40	bar		2.5 %	None	Back centric	1/4" BSPP[G]	Plastic	40	13373686

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.