



ECON® Ball valve Type: 7444EE Stainless steel Electric operated Internal thread (BSPP) 1000 PSI WOG



Mounted electrically controlled 2-way ball valve consisting of: Three-piece Econ® ball valve (type: 7444) and electric Econ® actuator (type: 7907).

The electrically controlled 2-way ball valve is configured according to the following basic principles: Medium is water, medium temperature is max. 100°C, ball valve is actuated at least a few times daily, actuator structure according to Eriks standard.

Characteristics

Type: 7444EE
Norm: EN (DIN)
Construction type: 2-way
Housing construction: 3-part
Housing material: Stainless steel
Material quality: 1.4408
Connection: Internal thread (BSPP)
Actuator: Electric operated
Top flange standard: ISO 5211 Direct Mount
Spindle material: 1.4401
Primary spindle seal material: PTFE
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: PTFE
Body seal: PTFE
Minimum medium temperature (continuous): -29 °C
Maximum medium temperature (continuous): 205 °C

Application

- Compressed air, central heating systems, water, fuel and slightly corrosive systems up to a maximum of 68 bar
- Recommended in: Food & Beverages

Technical Information

- Connection according to ISO 228-1 BSPP.
- Pressure class 1000 PSI WOG
- In sizes 0.25-4 inches.
- Connection voltage for ELA40 in 24V DC/95 to 245V AC
- Connection voltages for ELA60 to ELA200: 24V DC or 230V AC.
- Protection class for drive IP67
- Drive with anti-condensation heating
- Thermal protection of the electric motor.

Construction

- Three-piece housing construction.
- Design of the ball valve as per MSS SP-110
- Full bore.
- Equipped with anti-static design between ball, spindle and housing.

Approval

- TA Luft certified in accordance with VDI 2440, section 3.3.1.3.
- Declaration of conformity according to EC 1935/2004.

Options


ELA60 to ELA200 model only:

- Protection class for drive IP68 (10 m/72 h).
- Explosion-proof housing according to: II 2G Ex dB IIB T4 GB, II 2D Ex tb IIC T1 35°C dB.
- Fail-safe version with battery pack (ELA80 to ELA200).
- Proportional control unit for modulating purposes (input/output 0~10V DC 2~10V DC/4~20mA).
- Connection voltages: 24V AC/DC, 115V AC, 230V AC, 380V AC, 440V AC or 460V AC.

For all models:

- Stainless-steel extended spindle for insulation (Fig. 8007).
- Connection in NPT according to ASME B1.20.1.

Ball Valves | Automated ball valves with threaded connection

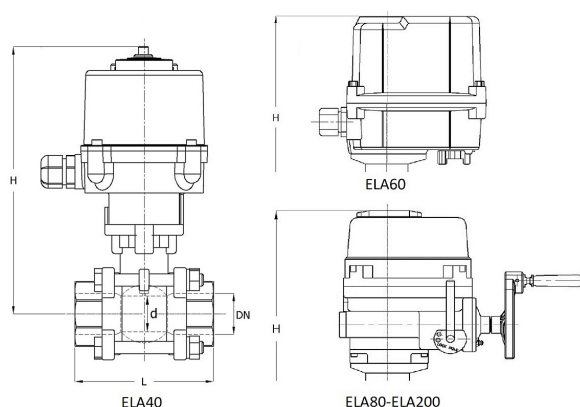

Size table:

DN	d mm	L mm	H mm	Weight kg
1/4" [8]	10.6	75	166.3	1.9
3/8" [10]	12.7	75	166.3	1.8
1/2" [15]	15	75	166.3	1.9
3/4" [20]	20	80	173.3	2.1
1" [25]	25	90	183.3	2.5
1.1/4" [32]	32	110	187.3	3.2
1.1/2" [40]	38	120	203	5.9
2.1/2" [65]	63.5	185.5	338	15.7
3" [80]	76	250	347	18.1
4" [100]	100	240	411	38.4

Nominal inner diameter	Standard thread connection	Pressure rating	Face to Face norm	Type coding actuator	Brand actuator	Supply voltage	Bore	Material ball	Seat material	Article
1/4" [8]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	24V DC/95-245V AC	Full bore	1.4408	PTFE	12576483
1/4" [8]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	230V AC	Full bore	1.4408	PTFE	12576461
3/8" [10]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	24V DC/95-245V AC	Full bore	1.4408	PTFE	12576484
3/8" [10]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	230V AC	Full bore	1.4408	PTFE	12576462
1/2" [15]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	24V DC/95-245V AC	Full bore	1.4408	PTFE	12576485
1/2" [15]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	230V AC	Full bore	1.4408	PTFE	12576463
3/4" [20]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	24V DC/95-245V AC	Full bore	1.4408	PTFE	12576486
1" [25]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	230V AC	Full bore	1.4408	PTFE	12576465
1.1/4" [32]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	230V AC	Full bore	1.4408	PTFE	12576466
1.1/4" [32]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA40	ECON	24V DC/95-245V AC	Full bore	1.4408	PTFE	12576488
1.1/2" [40]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA60	ECON	230V AC	Full bore	1.4408	PTFE	12576467
1.1/2" [40]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA60	ECON	24V DC	Full bore	1.4408	PTFE	12576489
2.1/2" [65]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA100	ECON	24V DC	Full bore	1.4408	PTFE	12576491
2.1/2" [65]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA100	ECON	230V AC	Full bore	1.4408	PTFE	12576469
3" [80]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA100	ECON	24V DC	Full bore	1.4408	PTFE	12576492
3" [80]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA100	ECON	230V AC	Full bore	1.4408	PTFE	12576470
4" [100]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA200	ECON	230V AC	Full bore	1.4408	PTFE	12576471
4" [100]	ISO 228-1	1000 PSI WOG	Manufacturer standard	ELA200	ECON	24V DC	Full bore	1.4408	PTFE	12576493

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.