



ECON® Ball valve Type: 7289EE Stainless steel Fire safe Electric operated Flange PN16/40



Characteristics

Type: 7289EE
Norm: EN (DIN)
Construction type: 2-way
Housing construction: 2-part
Housing material: Stainless steel
Material quality: 1.4408
Connection: Flange
Flange finish: Raised face
Actuator: Electric operated
Top flange standard: ISO 5211 Direct Mount
Primary spindle seal material: PTFE
Secondary spindle seal material: FPM (FKM)
Tertiary spindle seal material: Graphite
Body seal: SWG 316L/Graphite
Fire safe: Yes

Application

- Industrial applications up to 16 or 40bar.
- Liquid and gaseous media.
- Recommended in: Food & Beverages

Technical Information

- Flanged connection in accordance with EN1092-1.
- Pressure rating PN16 or PN40.
- Connection voltages: 24V DC or 230V AC.
- IP67 protection class.
- Drive with anti-condensation.
- Thermal protection of the electric motor.

Construction

- Two-piece housing construction.
- Design of ball valve in accordance with EN 12516-1.
- Full bore.
- Ball valve equipped with anti-static design between ball and housing.
- Face-to-face dimension according to EN 558, series 27.

Approval


- Fugitive emission certified in accordance with TA-Luft VDI 2440 / VDI 3479.
- Fugitive emission certified in accordance with ISO 15848-1 BH-CO1 and CH-CO3.
- Fire-safe approval in accordance with ISO 10497 and API 607, sixth edition.
- Safety class of ball valve in accordance with IEC 61508 SIL 2.
- Declaration of conformity according to EC1935/2004.

Options

- Protection class IP68 (10m/72h).
- Proportional control unit for modulating purposes (input/output 0~10V DC 2~10V DC/4~20mA).
- Explosion-proof housing according to: II 2G Ex dB IIB T4 Gb, II 2D Ex tb IIIC T1 35°C Db.
- Fail-safe version with battery pack (ELA80 to ELA300).
- Connection voltages: 24V AC/DC, 115V AC, 230V AC, 380V AC, 440V AC or 460V AC.
- Stainless-steel extended spindle for insulation (Fig. 8007).

Size table:

DN	Pressure class	d	L	H	Weight
		mm	mm	mm	kg
DN15	PN40	15	115	180	5.4
DN20	PN40	20	120	185	6.2
DN25	PN40	25	125	190.5	7.5
DN32	PN40	32	130	203	8.5
DN40	PN40	38	140	208	9.9
DN50	PN40	50	150	217	12.5
DN65	PN16	63.5	170	339.5	21.3
DN65	PN40	63.5	170	339.5	21.3
DN80	PN16	76	180	382.5	34.2
DN80	PN40	76	180	382.5	34.3
DN100	PN16	100	190	411	41.7
DN100	PN40	100	190	411	47
DN125	PN16	125	325	487	83
DN125	PN40	125	325	487	85.5
DN150	PN16	150	350	506	94.8
DN150	PN40	150	350	506	96.8
DN200	PN16	200	400	556.5	150

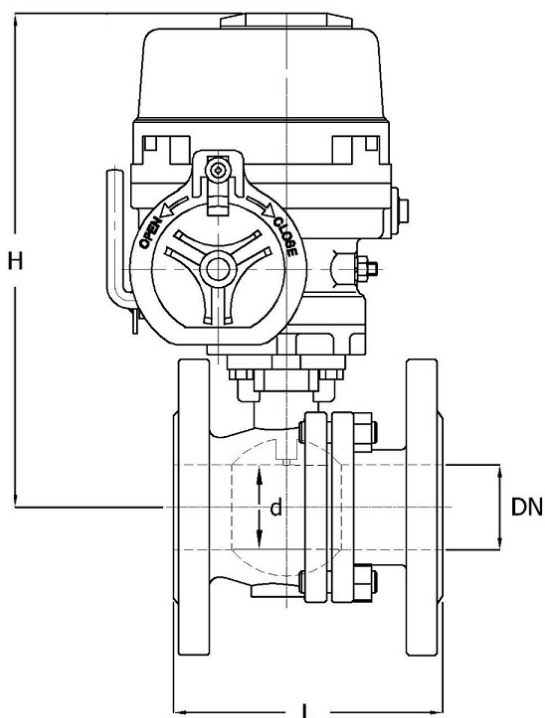

Nominal inner diameter	Pressure rating	Face to Face norm	Type coding actuator	Brand actuator	Supply voltage	Bore	Material ball	Seat material	Spindle material	Article
DN15	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576539
DN15	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576505
DN20	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576540
DN20	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576506
DN25	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576541
DN25	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576507
DN32	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576508
DN32	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576542
DN40	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576543
DN40	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576509
DN50	PN40	EN 558, Series 27	ELA60	ECON	24V DC	Full bore	1.4408	TFM 1600	1.4401	12576544
DN50	PN40	EN 558, Series 27	ELA60	ECON	230V AC	Full bore	1.4408	TFM 1600	1.4401	12576510
DN65	PN16	EN 558, Series 27	ELA100	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576511
DN65	PN16	EN 558, Series 27	ELA100	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576545
DN65	PN40	EN 558, Series 27	ELA100	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576512

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Ball Valves | Automated ball valves with flange connection

Nominal inner diameter	Pressure rating	Face to Face norm	Type coding actuator	Brand actuator	Supply voltage	Bore	Material ball	Seat material	Spindle material	Article
DN65	PN40	EN 558, Series 27	ELA100	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576546
DN80	PN16	EN 558, Series 27	ELA150	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576547
DN80	PN16	EN 558, Series 27	ELA150	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576513
DN80	PN40	EN 558, Series 27	ELA150	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576548
DN80	PN40	EN 558, Series 27	ELA150	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576514
DN100	PN16	EN 558, Series 27	ELA200	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576515
DN100	PN16	EN 558, Series 27	ELA200	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576549
DN100	PN40	EN 558, Series 27	ELA200	ECON	24V DC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576550
DN100	PN40	EN 558, Series 27	ELA200	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576516
DN125	PN16	EN 558, Series 27	ELA500	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576517
DN125	PN40	EN 558, Series 27	ELA500	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576518
DN150	PN16	EN 558, Series 27	ELA500	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576519
DN150	PN40	EN 558, Series 27	ELA500	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576520
DN200	PN16	EN 558, Series 27	ELA600	ECON	230V AC	Full bore	Stainless steel	TFM 1600	Stainless steel	12576521

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.