



JC Ball valve Series: 515IIT Type: 3194 Stainless steel Fire safe Flange Class 150

Characteristics

Series: 515IIT

Type: 3194

Norm: ASME

Construction type: 2-way

Housing construction: 2-part

Housing material: Stainless steel

Material quality: ASTM A351 CF8M

Connection: Flange

Flange finish: Raised face

Top flange standard: ISO 5211

Primary spindle seal material: RPTFE

Secondary spindle seal material: FPM (FKM)

Tertiary spindle seal material: Graphite

Body seal: SWG 316L/PTFE/Graphite

Minimum medium temperature (continuous): -50 °C

Maximum medium temperature (continuous): 230 °C

Fire safe: Yes

Application

- Heavy-duty industrial applications up to 20 bar.
- Recommended in: Chemical

Technical Information

- Flanged connection in accordance with ASME B16.5 RF.
- 1/2-inch to 8-inch versions with floating ball and 10-inch version with support ball.
- ASME pressure rating: class 150.
- With top-flange in accordance with ISO 5211.
- Media temperature: -50/+230°C.
- 1/2-inch to 6-inch versions with handle.
- 8-inch and 10-inch versions with worm gearbox.

Construction

- Two-piece housing construction.
- Design in accordance with API 6D and ASME B16.34.
- Full flow capacity.
- Equipped with antistatic design between ball and housing.
- According to NACE MR0175/ISO 15156 & AMP, NACE MR0103/ISO 17945.
- Construction length according to ASME B16.10: long pattern.

Approval


- Fire-safe certified in accordance with ISO 10497, API 6FA and API 607.
- Fugitive emissions certified according to TA Luft.
- Fugitive emissions certified in accordance with ISO 15848-1 (VDI 2440), class B, and optionally according to ISO 15848-1, class A, with double spindle seal.
- Safety integrity level IEC 61508 SIL3.
- Declaration of conformity according to EC 1935/2004 and FDA USP, class VI.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manual or automated valves.
- Pressure-relief seats or a pressure-relief hole in the ball.
- Dead space – free seats.
- Stainless-steel extended spindle for insulation (type 3222).
- Handle with lock.
- Other seat materials.

Size table:

DN	d	L	H	M	C	Weight
	mm	mm	mm	mm	mm	kg
1/2" [15]	15	108	111	164		2
3/4" [20]	20	117	118	164		3
1" [25]	25	127	130	164		3.5
1.1/2" [40]	40	165	148	213		8
2" [50]	50	178	155	213		11
3" [80]	80	203	207	445		23
4" [100]	100	229	232	495		38
6" [150]	151	394	298	698		88
8" [200]	203	457	601	465	229	172.8
10" [250]	254	533	691	600	370	259.5

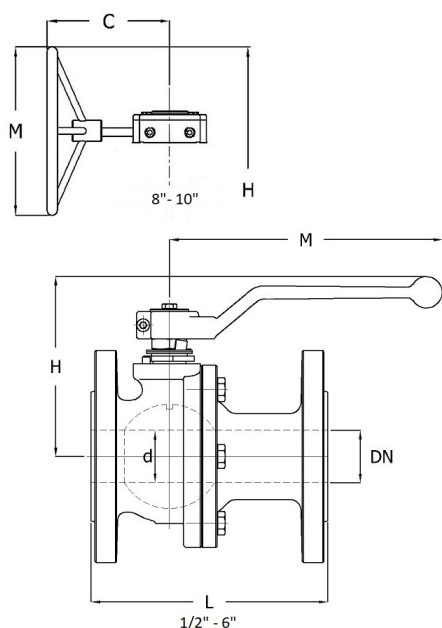

Pressure and temperature range

Size	Temperature range	-50	38	100	150	200	230	[°C]
1/2" - 4"	-50°/+230°C	19.6	19	16.2	14.8	12	0	[bar]
6" - 10"	-50°/+230°C	19.6	19	16.2	14.8	10	0	[bar]

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Bore	Material ball	Seat material	Spindle material	Actuator material	Article
1/2" [15]	Class 150	ASME B16.10, T1, Serie 18	Handle	F05	Full bore	ASTM A479 316	PTFE	ASTM A479 316	ASTM A216 WCB	10054787
3/4" [20]	Class 150	ASME B16.10, T1, Serie 18	Handle	F05	Full bore	ASTM A479 316	PTFE	ASTM A479 316	ASTM A216 WCB	11094786
1" [25]	Class 150	ASME B16.10, T1, Serie 18	Handle	F05	Full bore	ASTM A479 316	PTFE	ASTM A479 316	ASTM A216 WCB	10054782
1.1/2" [40]	Class 150	ASME B16.10, T1, Serie 18	Handle	F07	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	ASTM A216 WCB	10054788
2" [50]	Class 150	ASME B16.10, T1, Serie 18	Handle	F07	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	ASTM A216 WCB	10054783
3" [80]	Class 150	ASME B16.10, T1, Serie 18	Handle	F10	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	ASTM A216 WCB	10054784
4" [100]	Class 150	ASME B16.10, T1, Serie 18	Handle	F10	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	ASTM A216 WCB	10054785
6" [150]	Class 150	ASME B16.10, T1, Serie 18	Handle	F12	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	ASTM A216 WCB	10054786
8" [200]	Class 150	ASME B16.10, T1, Serie 18	Gearbox	F14	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	Ductile cast iron	11094787
10" [250]	Class 150	ASME B16.10, T1, Serie 18	Gearbox	F14	Full bore	ASTM A351 CF8M	PTFE	ASTM A479 316	Ductile cast iron	11094788

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.