



ASAHI Ball valve Series: 21 Type: 3726 PP Internal thread (BSPP) PN10

Characteristics

Series: 21

Type: 3726

Construction type: 2-way

Housing construction: 3-part

Housing material: PP

Connection: Internal thread (BSPP)

Secondary spindle seal material: EPDM

Body seal: EPDM


Actuator material: ABS

Minimum medium temperature (continuous): -20 °C

Maximum medium temperature (continuous): 80 °C

Application

- Recommended in: Chemical

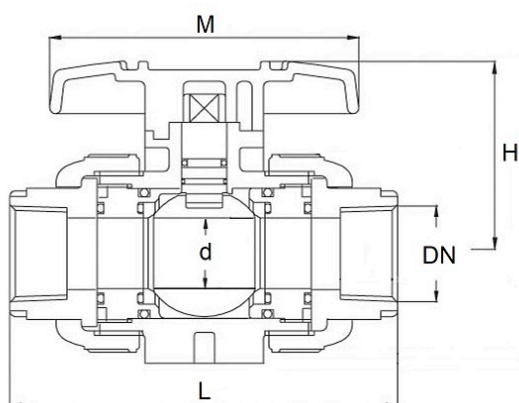

Size table:

DN	d	L	H	M	Weight
	mm	mm	mm	mm	kg
3/8" [10]	13	98	43.5	80	0.1
1/2" [15]	15	100	51.5	92	0.2
3/4" [20]	20	119	59.5	100	0.3
1" [25]	25	130	68	110	0.4
1.1/4" [32]	32	146	80.5	121	0.6
1.1/2" [40]	40	160	89	131	0.7
2" [50]	51	194	102.5	159	1.2

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Bore	Material ball	Seat material	Spindle material	Primary spindle seal material	Kv value m³/h	Article
3/8" [10]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	6.6	12478834
1/2" [15]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	12	12478835
3/4" [20]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	24.9	12478837
1" [25]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	40.3	12478838
1.1/4" [32]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	62.4	12478839
1.1/2" [40]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	125.7	12478840
2" [50]	PN10	Manufacturer standard	Handle	Full bore	PP	PTFE	PP	EPDM	156.9	12478841

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.