



ASAHI Ball valve Series: 21 Type: 3725 PVC-U Internal thread (BSPP) PN16

Characteristics

Series: 21

Type: 3725

Construction type: 2-way

Housing construction: 3-part

Housing material: PVC-U

Connection: Internal thread (BSPP)

Secondary spindle seal material: EPDM

Body seal: EPDM


Actuator material: ABS

Minimum medium temperature (continuous): 0 °C

Maximum medium temperature (continuous): 60 °C

Application

- Recommended in: Chemical

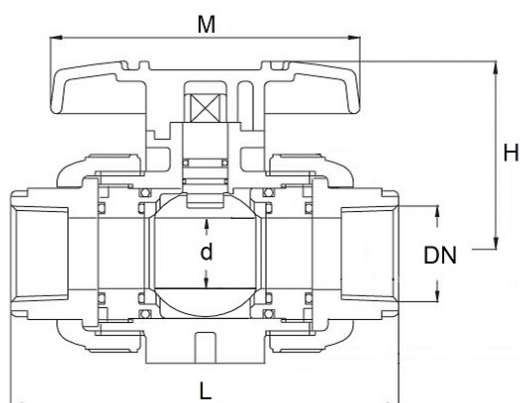

Size table:

DN	d	L	H	M	Weight
	mm	mm	mm	mm	kg
3/8" [10]	13	99	43.5	80	0.2
1/2" [15]	15	102	51.5	92	0.2
3/4" [20]	20	120	59.5	100	0.3
1" [25]	25	131	68	110	0.4
1.1/4" [32]	32	150	80.5	121	0.7
1.1/2" [40]	40	163	89	131	1.1
2" [50]	51	197	102.5	159	1.8

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Bore	Material ball	Seat material	Spindle material	Primary spindle seal material	Kv value m³/h	Article
3/8" [10]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	6.6	12478733
1/2" [15]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	12	12478734
3/4" [20]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	24.9	12478735
1" [25]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	40.3	12478736
1.1/4" [32]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	62.4	12478737
1.1/2" [40]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	125.7	12478738
2" [50]	PN16	Manufacturer standard	Handle	Full bore	PVC-U	PTFE	PVC-U	EPDM	156.9	12478739

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.