



VOSS Male stud branch tee BSP tapered SDT/SDCT

- Male stud branch tee
- Male thread: BSPT thread, tapered
- Sealing type: Tapered thread
- L and S series
- Complete (SDTC) or without nut and cutting ring (SDT)
- Steel, zinc-nickel coated

Characteristics

Series: TEV-R-keg.

Material: Steel

Surface protection: Zinc-Nickel


Adjustable: No

Connection 1: Male stud coupling

Connection 2: External thread

Port seal: Tapered thread

Size table:

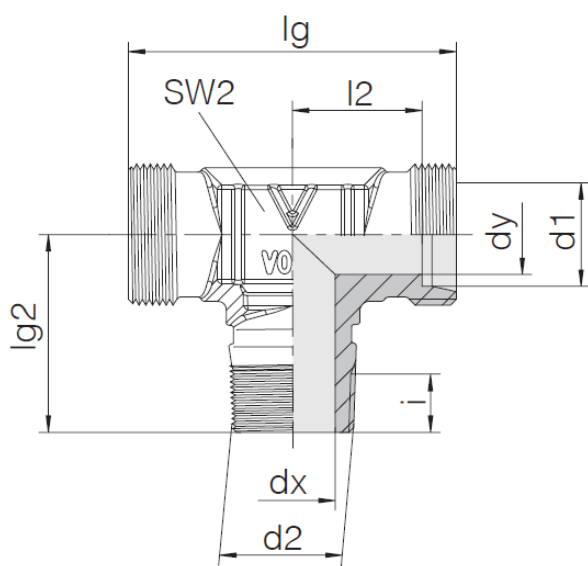

d1	d2	dx	dy	i	l2	lg	lg2	SW2
mm		mm	mm	mm	mm	mm	mm	mm
4	R 1/8	4	3	6.2	11	30	17	9
6	R 1/8	4	4	6.2	12	38	20	12
6	R 1/8	4.5	4.5	6.2	9.5	30	17	9
6	R 1/4	4	4	9.3	16	46	26	14
8	R 1/4	6	6	9.3	14	42	26	14
8	R 1/8	6	6	6.2	11.5	34	20	12
8	R 1/4	5	5	9.3	17	48	27	17
10	R 1/4	7	8	9.3	15	44	27	17
10	R 3/8	7	7	9.3	17.5	50	28	19
12	R 3/8	9	10	9.3	17	48	28	19
12	R 3/8	8	8	9.3	21.5	58	28	22
14	R 1/2	10	10	10.4	22	60	32	19
15	R 1/2	11	12	10.4	21	56	34	19
16	R 1/2	12	12	10.4	24.5	66	32	24
18	R 1/2	14	15	10.4	23.5	62	36	24

Designation	Manufacturer ID	Load class [DIN 2353]	Connection size 1	Connection size 2	Nominal pressure	Article
TE04LLR1/8 con	24-SDTC-LL4-R1/8T		4LL - M8x1.0	1/8" BSP con.	PN100	11450334
TE06LR1/8 con	24-SDTC-L6-R1/8T-P		6L - M12x1.5	1/8" BSP con.	PN315	793787
TE06LLR1/8 con	24-SDTC-LL6-R1/8T		6LL - M10x1.0	1/8" BSP con.	PN100	11450335
TE06SR1/4 con	24-SDTC-S6-R1/4T-P		6S - M14x1.5	1/4" BSP con.	PB 630	957674
TE08LR1/4 con	24-SDTC-L8-R1/4T-P		8L - M14x1.5	1/4" BSP con.	PN315	793795
TE08LLR1/8 con	24-SDTC-LL8-R1/8T-P		8LL - M12x1.0	1/8" BSP con.	PN100	11450336

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Designation	Manufacturer ID	Load class (DIN 2353)	Connection size 1	Connection size 2	Nominal pressure	Article
TE08SR1/4 con	24-SDTC-S8-R1/4T-P		8S - M16x1.5	1/4" BSP con.	PB 630	794007
TE10LR1/4 con	24-SDTC-L10-R1/4T-P		10L - M16x1.5	1/4" BSP con.	PN315	793809
TE10SR3/8 con	24-SDTC-S10-R3/8T-P		10S - M18x1.5	3/8" BSP con.	PB 630	601608
TE12LR3/8 con	24-SDTC-L12-R3/8T-P		12L - M18x1.5	3/8" BSP con.	PN315	793817
TE12SR3/8 con	24-SDTC-S12-R3/8T-P		12S - M20x1.5	3/8" BSP con.	PB 630	794023
TE14SR1/2 con	24-SDTC-S14-R1/2T		14S - M22x1.5	1/2" BSP con.	PB 630	794031
TE15LR1/2 con	24-SDTC-L15-R1/2T		15L - M22x1.5	1/2" BSP con.	PN315	793833
TE16SR1/2 con	24-SDTC-S16-R1/2T		16S - M24x1.5	1/2" BSP con.	PB 400	794058
TE18LR1/2 con	24-SDTC-L18-R1/2T		18L - M26x1.5	1/2" BSP con.	PN315	793841
	130802007	S				1010179
TE04LLR1/8 con -m+d	24-SDT-LL4-R1/8T		4LL - M8x1.0	1/8" BSP con.	PN100	11450337
TE06LR1/8 con -m+d	24-SDT-L6-R1/8T-P		6L - M12x1.5	1/8" BSP con.	PN315	11450340
TE06LLR1/8 con -m+d	24-SDT-LL6-R1/8T		6LL - M10x1.0	1/8" BSP con.	PN100	11450338
TE06SR1/4 con -m+d	24-SDT-S6-R1/4T-P		6S - M14x1.5	1/4" BSP con.	PB 630	11450345
TE08LR1/4 con -m+d	24-SDT-L8-R1/4T-P		8L - M14x1.5	1/4" BSP con.	PN315	11450341
TE08LLR1/8 con -m+d	24-SDT-LL8-R1/8T-P		8LL - M12x1.0	1/8" BSP con.	PN100	11450339
TE08SR1/4 con -m+d	24-SDT-S8-R1/4T-P		8S - M16x1.5	1/4" BSP con.	PB 630	11450346
TE10LR1/4 con -m+d	24-SDT-L10-R1/4T-P		10L - M16x1.5	1/4" BSP con.	PN315	11450342
TE10SR3/8 con -m+d	24-SDT-S10-R3/8T-P		10S - M18x1.5	3/8" BSP con.	PB 630	11450347
TE12LR3/8 con -m+d	24-SDT-L12-R3/8T-P		12L - M18x1.5	3/8" BSP con.	PN315	1060168
TE12SR3/8 con -m+d	24-SDT-S12-R3/8T-P		12S - M20x1.5	3/8" BSP con.	PB 630	11450348
TE14SR1/2 con -m+d	24-SDT-S14-R1/2T		14S - M22x1.5	1/2" BSP con.	PB 630	11450349
TE15LR1/2 con -m+d	24-SDT-L15-R1/2T		15L - M22x1.5	1/2" BSP con.	PN315	11450343
TE16SR1/2 con -m+d	24-SDT-S16-R1/2T		16S - M24x1.5	1/2" BSP con.	PB 400	11450350
TE18LR1/2 con -m+d	24-SDT-L18-R1/2T		18L - M26x1.5	1/2" BSP con.	PN315	11450344

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.