



Filter spade ANSI

Filter spades metallic are temporary applied after work has been done on piping systems, to prevent residues (for example from welding) coming into the piping system, pumps, compressors or mech. Seals.

Filter spades metallic are also called metallic filter spades.

Characteristics

Material: Stainless steel

Material quality: 316L


Handle marking: Size, pressure class, material, thickness and mesh number

Execution: Smooth Finish [RA 3,2-6,3] on sealing face of both sides

Flow side: side with marking on handle is flow side (finer mesh is on front)

Size table:

A mm	B mm	D mm
47.8	14.3	24.7
54.1	14.3	24.7
57.2	20.6	30.7
66.8	20.6	30.7
66.8	27	37.2
73.2	27	37.2
104.9	55.6	70.1
111.3	55.6	70.1
136.7	81	101.8
149.9	81	101.8
174.8	106.4	127.2
181.1	106.4	127.2
85.9	43	54.3
95.3	43	54.3

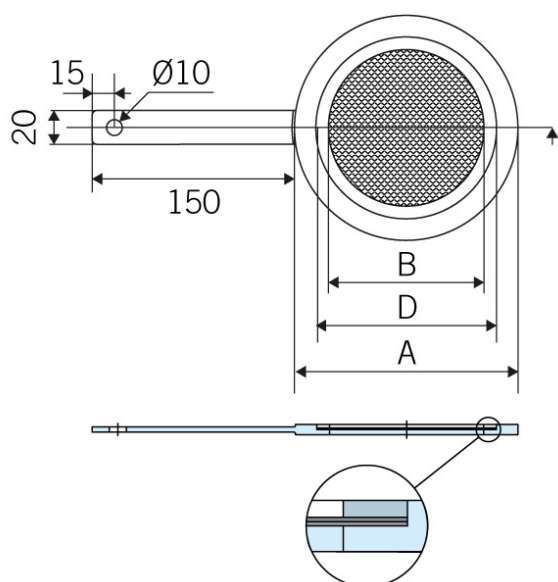

Nominal diameter [ASME] in	Flange pressure class [ASME] lb	Thickness mm	Handle size	With gauze	A mm	B mm	D mm	Article
1/2"	150	4	150x20x3	40/100	47.8	14.3	24.7	13027524
1/2"	150	6	150x20x3	25/70	47.8	14.3	24.7	12452443
1/2"	150	6	150x20x3	18/120	47.8	14.3	24.7	12447294
1/2"	300	4	150x20x3	40/100	54.1	14.3	24.7	13027531
1/2"	300	6	150x20x3	25/70	54.1	14.3	24.7	12452450
1/2"	300	6	150x20x3	18/120	54.1	14.3	24.7	12447306
3/4"	150	4	150x20x3	40/100	57.2	20.6	30.7	13027525
3/4"	150	6	150x20x3	18/120	57.2	20.6	30.7	12447297

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

Nominal diameter (ASME)	Flange pressure class (ASME)	Thickness	Handle size	With gauze	A	B	D	Article
in	lb	mm			mm	mm	mm	
3/4"	300	4	150x20x3	40/100	66.8	20.6	30.7	13027532
3/4"	300	6	150x20x3	25/70	66.8	20.6	30.7	12452451
3/4"	300	6	150x20x3	18/120	66.8	20.6	30.7	12447307
1"	150	4	150x20x3	40/100	66.8	27	37.2	13027526
1"	150	6	150x20x3	25/70	66.8	27	37.2	12452445
1"	150	6	150x20x3	18/120	66.8	27	37.2	12447299
1"	300	4	150x20x3	40/100	73.2	27	37.2	13027533
1"	300	6	150x20x3	25/70	73.2	27	37.2	12452452
1"	300	6	150x20x3	18/120	73.2	27	37.2	12447308
2"	150	4	150x20x3	40/100	104.9	55.6	70.1	13027528
2"	150	6	150x20x3	25/70	104.9	55.6	70.1	12452447
2"	150	6	150x20x3	18/120	104.9	55.6	70.1	12447301
2"	300	4	150x20x3	40/100	111.3	55.6	70.1	13027535
2"	300	6	150x20x3	18/120	111.3	55.6	70.1	12447310
2"	300	6	150x20x3	25/70	111.3	55.6	70.1	12452454
3"	150	4	150x20x3	40/100	136.7	81	101.8	13027529
3"	150	6	150x20x3	25/70	136.7	81	101.8	12452448
3"	150	6	150x20x3	18/120	136.7	81	101.8	12447303
3"	300	4	150x20x3	40/100	149.9	81	101.8	13027536
3"	300	6	150x20x3	18/120	149.9	81	101.8	12447311
3"	300	6	150x20x3	25/70	149.9	81	101.8	12452455
4"	150	4	150x20x3	40/100	174.8	106.4	127.2	13027530
4"	150	6	150x20x3	18/120	174.8	106.4	127.2	12447304
4"	150	6	150x20x3	25/70	174.8	106.4	127.2	12452449
4"	300	4	150x20x3	40/100	181.1	106.4	127.2	13027537
4"	300	6	150x20x3	18/120	181.1	106.4	127.2	12447312
4"	300	6	150x20x3	25/70	181.1	106.4	127.2	12452456
1.1/2"	150	4	150x20x3	40/100	85.9	43	54.3	13027527
3/4"	150	6	150x20x3	25/70	57.2	20.6	30.7	12452444
1.1/2"	150	6	150x20x3	18/120	85.9	43	54.3	12447300
1.1/2"	150	6	150x20x3	25/70	85.9	43	54.3	12452446
1.1/2"	300	4	150x20x3	40/100	95.3	43	54.3	13027534
1.1/2"	300	6	150x20x3	18/120	95.3	43	54.3	12447309
1.1/2"	300	6	150x20x3	25/70	95.3	43	54.3	12452453

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.