

CR Adjustable combined bearing




Characteristics

Maintenance free: Yes

Size table:

A	B	d	D	H	h	r	S	T
mm	mm	mm	mm	mm	mm	mm	mm	mm
5.5	20	30	62	43	33	3	16	42
5.5	20	30	62.5	43	33	3	16	42
6.5	23	35	70.1	48	40	4	16	48
7	23	40	77.7	51	39.5	4	21	53
7	23	40	77.7	45	34	4	21	53
7	30	45	88.4	61	48	3	21	59
7	28	50	101.2	50.5	37.5	3	21	67
15	45	60	149	59	69	5	5	103

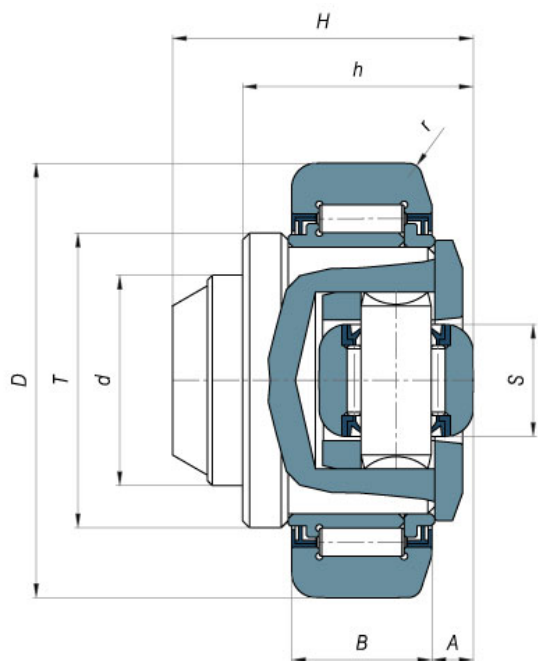

Manufacturer ID	Diameter	Outer diameter	Width	Dynamic load rating	Static load rating	Dynamic axial load rating	Static axial load rating	Mounting profile	A	Article
	mm	mm	mm	kN	kN	kN	kN		mm	
400-0072	30	62	20	39	65.2	5.8	6	2890	5.5	14065747
400-0072-62,5	30	62.5	20	39	65.2	5.8	6	2890	5.5	14065748
400-0073	35	70.1	23	55.5	91.7	5.8	6	2867	6.5	14065749
400-0074	40	77.7	23	58.4	100	13.2	14.5	2810	7	14065750
400-0075	40	77.7	23	48	56.8	14	14	3019	7	14065751
400-0076	45	88.4	30	83.8	132.3	13.2	14.5	2811	7	14065752
400-0077	50	101.2	28	73	82	18	19	2912	7	14065753
400-0080	60	149	45	172.3	325.9	83	130	2757	15	14065754

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.