




ASCO Solenoid valve 2/2 Type: 32309 Series: 215 Aluminium Indirect-acting Normally closed (NC)

Characteristics

Series: 215
Type: 32309
Function: Normally closed (NC)
Actuation: Indirect-acting
Electrical connection: Plug EN 175301-803 type A
Housing material: Aluminium
Sealing: NBR
Material coil housing: Epoxy
Material shorting ring: Copper
Membrane material: NBR
Working time: 100 %

Characteristics [2]

Level of protection (IP value): IP65
Emergency manual operation: None
Explosion-proof: No
Medium temperature: From -20 °C to 85 °C
Ambient temperature: From -20 °C to 75 °C

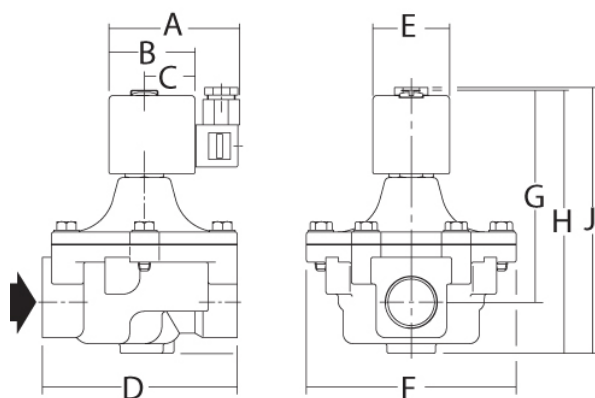

Size table:

Orifice mm
19
41
53

Size process connection	Process connection	Orifice mm	Kvs value m ³ /h	Minimum pressure difference bar	Maximum pressure difference bar	Coil type	Supply voltage	Power	Starting power	Article
1/2" [15]	Internal thread (BSPP)	19	3.8	0	3.5	400525-117	230V AC	10.5 W / 23 VA	55 VA	11815178
3/4" [20]	Internal thread (BSPP)	19	4.4	0	1.8	400425-142	24V DC	9 W [hot] - 11.2 W [cold]		11815180
3/4" [20]	Internal thread (BSPP)	19	4.4	0	3.5	400425-117	230V AC	10.5 W / 23 VA	55 VA	11815179
1" [25]	Internal thread (BSPP)	41	18	0	1.8	400525-117	230V AC	15.4 W / 33.6 VA	110 VA	12159935
1.1/4" [32]	Internal thread (BSPP)	41	27	0	1.8	400525-101	24V AC	15.4 W / 33.6 VA	110 VA	11815175
1.1/4" [32]	Internal thread (BSPP)	41	27	0	1.8	400525-117	230V AC	15.4 W / 33.6 VA	110 VA	12159936
1.1/2" [40]	Internal thread (BSPP)	41	30	0	1.8	400525-117	230V AC	15.4 W / 33.6 VA	110 VA	11412593
2" [50]	Internal thread (BSPP)	53	50	0	1.8	400525-117	230V AC	15.4 W / 33.6 VA	110 VA	11815177

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.