



HAVIT SAE flange metric tapped 24° DIN 3901 AFG


Supplied without bolt set and O-ring.

Characteristics


- Series: AFG
- Flange type: SAE threaded flange DIN 3901-3902
- Material: Steel
- Thread form: Metric 24° cone

Size table:

Pressure class	SAE flange size	A	B	C	D	E	F	G	H
psi	in		mm	mm	mm	mm	mm	mm	mm
3000	1/2	M 22x1.5	12	38.1	54	17.5	46	52	13
3000	1/2	M 24x1.5	12	38.1	54	17.5	46	52	13
3000	3/4	M 30x2	16	47.6	65	22.3	50	60	14
3000	3/4	M 30x2	19	47.6	65	22.3	50	60	14
3000	1	M 30x2	16	52.4	70	26.2	55	63	16
3000	1	M 30x2	19	52.4	70	26.2	55	63	16
3000	1	M 36x2	20	52.4	70	26.2	55	63	16
3000	1	M 36x2	24	52.4	70	26.2	55	63	16
3000	1.1/4	M 36x2	24	58.7	79	30.2	68	65	14
3000	1.1/4	M 42x2	25	58.7	79	30.2	68	65	14
3000	1.1/4	M 45x2	29	58.7	79	30.2	68	65	14
3000	1.1/2	M 52x2	32	69.9	94	35.7	78	70	16
3000	1.1/2	M 52x2	36	69.9	94	35.7	78	70	16
6000	3/4	M 30x2	16	50.8	71	23.8	50	52	19
6000	3/4	M 36x2	19	50.8	71	23.8	60	73	19
6000	1	M 36x2	19/26	57.2	81	27.8	70	82	24
6000	1	M 42x2	25	57.2	81	27.8	70	82	24
6000	1.1/4	M 42x2	25	66.6	95	31.8	78	92	27

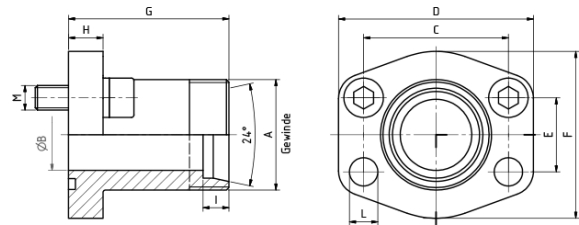

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

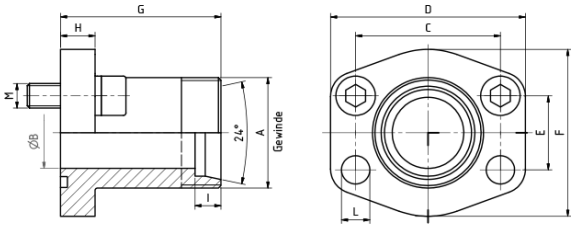

Size table:

Pressure class	SAE flange size	A	B	C	D	E	F	G	H
6000	1.1/4	M 52x2	29	66.6	95	31.8	78	92	27
6000	1.1/2	M 52x2	32	79.3	113	36.5	95	96	30

Pressure class psi	SAE flange size in	Surface protection	Thread size	Max. operation pressure bar	Article
3000	1/2	Zinc-Nickel	15L - M22x1.5	315	14306128
3000	1/2	Zinc-Nickel	16S - M24x1.5	315	14306133
3000	3/4	Zinc-Nickel	20S - M30x2.0	345	14306155
3000	3/4	Zinc-Nickel	22L - M30x2.0	160	14306150
3000	1	Zinc-Nickel	20S - M30x2.0	320	14306195
3000	1	Zinc-Nickel	22L - M30x2.0	160	14306176
3000	1	Zinc-Nickel	25S - M36x2.0	320	14306200
3000	1	Zinc-Nickel	28L - M36x2.0	160	14306186
3000	1.1/4	Zinc-Nickel	28L - M36x2.0	160	14306239
3000	1.1/4	Zinc-Nickel	30S - M42x2.0	280	14306263
3000	1.1/4	Zinc-Nickel	35L - M45x2.0	160	14306249
3000	1.1/2	Zinc-Nickel	38S - M52x2.0	210	14306302
3000	1.1/2	Zinc-Nickel	42L - M52x2.0	160	14306291
6000	3/4	Zinc-Nickel	20S - M30x2.0	420	14306357
6000	3/4	Zinc-Nickel	25S - M36x2.0	420	14306369
6000	1	Zinc-Nickel	25S - M36x2.0	420	14306392
6000	1	Zinc-Nickel	30S - M42x2.0	420	14306400
6000	1.1/4	Zinc-Nickel	30S - M42x2.0	420	14306436
6000	1.1/4	Zinc-Nickel	38S - M52x2.0	420	14306447
6000	1.1/2	Zinc-Nickel	38S - M52x2.0	420	14306475

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.