

ECON® Pressure reducing valve Type 8230 bronze external thread

Characteristics

Type: 8230
Model: Direct-acting
Connection: External thread
Maximum inlet pressure: 40 bar
Medium temperature: -20 / 120 °C
Suitable for gases: 1
Housing material: Bronze
Material quality: CC499K
Material disc: Bronze
Seat material: Bronze
Membrane material: EPDM
Spring material: Spring steel
Material spring bonnet: Bronze
Filter element material: 1.4404
With couplers: Yes
Backflow preventer: No

Application

Media for versions with EPDM diaphragm:

- Air.
- Hot water.
- Neutral and non-adhesive liquids.
- Neutral gases and vapours.

Media for version with optional FPM diaphragm:

- Non-neutral liquids.
- Oils.
- Compressed air with aerosol oil.
- Fuels.

Fields of application:

- Process water facility industry.
- Process water facility building.
- Sprinkler system.
- Drinking water applications.
- Maritime industry.
- Recommended in: Food & Beverages

Technical Information


- Suitable for drinking water in accordance with DIN 1988.
- EPDM diaphragm fitted as standard.

Options

- Version with FPM diaphragm.
- Manual adjustment knob.

Size table:

Dimension	P bar	H mm	H1 mm	L mm
1.1/2" BSPP(G)	1 / 8	70	165	226
1.1/2" BSPP(G)	0.5 / 2	70	185	226
1.1/2" BSPP(G)	5 / 15	70	165	226
1.1/4" BSPP(G)	5 / 15	45	130	193
1.1/4" BSPP(G)	0.5 / 2	45	150	193
1.1/4" BSPP(G)	1 / 8	45	130	193
1/2" BSPP(G)	5 / 15	33	102	142
1/2" BSPP(G)	0.5 / 2	33	128	142
1/2" BSPP(G)	1 / 8	33	102	142
1" BSPP(G)	1 / 8	45	130	180
1" BSPP(G)	0.5 / 2	45	150	180
1" BSPP(G)	5 / 15	45	130	180
2" BSPP(G)	0.5 / 2	70	185	252
2" BSPP(G)	5 / 15	70	165	252
2" BSPP(G)	1 / 8	70	165	252
3/4" BSPP(G)	1 / 8	33	102	158
3/4" BSPP(G)	5 / 15	33	102	158
3/4" BSPP(G)	0.5 / 2	33	128	158

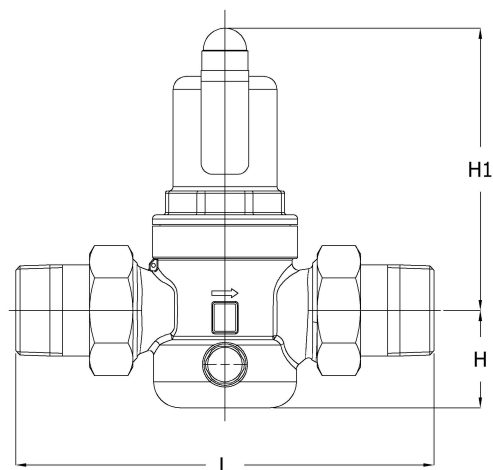

Connection size	Reduced pressure range bar	Article
1.1/2" BSPP(G)	1 / 8	13456115
1.1/2" BSPP(G)	0.5 / 2	13456114
1.1/2" BSPP(G)	5 / 15	13456116
1.1/4" BSPP(G)	5 / 15	13456113
1.1/4" BSPP(G)	0.5 / 2	13456112
1.1/4" BSPP(G)	1 / 8	13455325
1/2" BSPP(G)	5 / 15	13456105
1/2" BSPP(G)	0.5 / 2	13456103
1/2" BSPP(G)	1 / 8	13456104
1" BSPP(G)	1 / 8	13456110
1" BSPP(G)	0.5 / 2	13456109
1" BSPP(G)	5 / 15	13456111
2" BSPP(G)	0.5 / 2	13456117
2" BSPP(G)	5 / 15	13456119
2" BSPP(G)	1 / 8	13456118
3/4" BSPP(G)	1 / 8	13456107
3/4" BSPP(G)	5 / 15	13456108
3/4" BSPP(G)	0.5 / 2	13456106

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.