



ECON® Ball valve Type: 72851 Stainless steel Fire safe Flange Class 150



Characteristics

Type: 72851
Norm: ASME
Construction type: 2-way
Housing construction: 2-part
Housing material: Stainless steel
Material quality: ASTM A351 CF8M
Connection: Flange
Flange finish: Raised face
Top flange standard: ISO 5211 Direct Mount
Seat material: TFM 1600
Spindle material: ASTM A276 316
Primary spindle seal material: PTFE
Secondary spindle seal material: Kalrez 6375
Tertiary spindle seal material: Graphite
Body seal: SWG 316L/PTFE/Graphite
Minimum medium temperature (continuous): -29 °C
Maximum medium temperature (continuous): 200 °C
Maximum operating pressure [Bar]: 20 bar
Fire safe: Yes

Application

- Industrial and chemical applications up to 20 bar.
- Liquid and gaseous media.
- Recommended in: Chemical

Technical Information

- Flanged connection in accordance with ASME B16.5 RF.
- Floating ball.
- ASME pressure rating: class 150.
- With direct-mount top flange in accordance with ISO 5211.
- All components intended to come into contact with food comply with EC 1935.
- Media temperature: -29/+200°C.
- ½" to 3" with lever and locking device.
- 4" to 6" with T-bar.
- 8" without control as standard.

Construction


- Two-piece housing construction.
- Design according to ASME B16.34.
- Full bore.
- Equipped with anti-static design between ball and housing.
- Face-to-face dimension according to ASME B16.10: long pattern.

Approval

- Fugitive emission certified in accordance with TA-Luft VDI 2440 / VDI 3479.
- Fugitive emission certified in accordance with ISO 15848-1 BH-CO1 and CH-CO3.
- Fire-safe approval in accordance with ISO 10497 and API 607, sixth edition.
- Safety integrity level IEC 61508 SIL 2.
- Declaration of conformity according to EC 1935/2004.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manually actuated or automated valves.
- Available with seats in TF4215.
- Stainless steel extended spindle type 8007 for insulation.

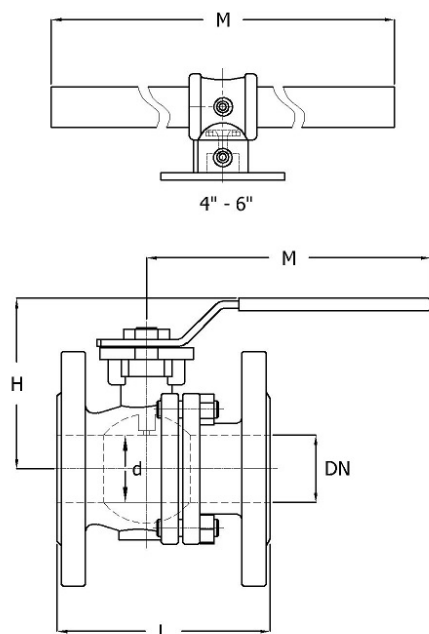

Size table:

DN	d mm	L mm	H mm	M mm	Weight kg
1/2" [15]	15	108	79	145	1.7
3/4" [20]	20	117	84	145	2.2
1" [25]	25	127	90.5	175	2.9
1.1/2" [40]	38	165	111	194	5.9
2" [50]	50	178	116	194	8.4
3" [80]	76	203	160	265	17.8
4" [100]	100	229	182	400	30.5
6" [150]	150	394	280	800	72
8" [200]	200	457	279.5		131.4

Pressure and temperature range						
DN	-29	38	93	149	200	[°C]
1/2" - 4"	19	19	16	15	13	[bar]
6" - 8"	19	19	16	15	12	[bar]

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Material ball	Actuator material	Article
1/2" [15]	Class 150	ASME B16.10, T1, Serie 18	Handle	F03	F04	Full bore	Yes	ASTM A351 CF8M	1.4301	EC7285101/2RPIL
3/4" [20]	Class 150	ASME B16.10, T1, Serie 18	Handle	F03	F05	Full bore	Yes	ASTM A351 CF8M	1.4301	EC7285103/4RPIL
1" [25]	Class 150	ASME B16.10, T1, Serie 18	Handle	F04	F05	Full bore	Yes	ASTM A351 CF8M	1.4301	EC728510001RPIL
1.1/2" [40]	Class 150	ASME B16.10, T1, Serie 18	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	EC7285111/2RPIL
2" [50]	Class 150	ASME B16.10, T1, Serie 18	Handle	F05	F07	Full bore	Yes	ASTM A351 CF8M	1.4301	EC728510002-RPIL
3" [80]	Class 150	ASME B16.10, T1, Serie 18	Handle	F07	F10	Full bore	Yes	ASTM A351 CF8M	1.4301	EC728510003-RPIL
4" [100]	Class 150	ASME B16.10, T1, Serie 18	T-wrench	F10		Full bore	No	ASTM A351 CF8M	Steel, galvanized	EC728510004-RPIL
6" [150]	Class 150	ASME B16.10, T1, Serie 18	T-wrench	F12		Full bore	No	ASTM A351 CF8M	Steel, galvanized	EC728510006-RPIL
8" [200]	Class 150	ASME B16.10, T1, Serie 18	Bare stem	F14		Full bore	No	ASTM A351 CF8M		14463313

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.