



ECON® Ball valve Type: 72891 Stainless steel Fire safe Flange PN16/40



Characteristics

Type: 72891
Norm: EN (DIN)
Construction type: 2-way
Housing construction: 2-part
Housing material: Stainless steel
Material quality: 1.4408
Connection: Flange
Flange finish: Raised face
Top flange standard: ISO 5211 Direct Mount
Material ball: 1.4408
Seat material: TFM 1600
Spindle material: 1.4401
Primary spindle seal material: PTFE
Secondary spindle seal material: Kalrez 6375
Tertiary spindle seal material: Graphite
Body seal: SWG 316L/PTFE/Graphite
Minimum medium temperature (continuous): -29 °C
Maximum medium temperature (continuous): 200 °C
Fire safe: Yes

Application

- Industrial and chemical applications up to 16 or 40 bar.
- Liquid and gaseous media.
- Recommended in: Chemical

Technical Information

- Flanged connection in accordance with EN1092-1.
- Floating ball.
- Pressure rating PN16 or PN40.
- With direct-mount top flange in accordance with ISO 5211.
- All components intended to come into contact with food comply with EC 1935.
- Media temperature: -29/+200°C.
- Designed with Kalrez spindle seal.
- DN15 to DN80 with "Heavy Duty" lever.
- DN100 to DN150 with T-bar.
- DN200 as standard with bare stem.

Construction


- Two-piece housing construction.
- Design according to EN 12516-1.
- Full bore.
- Equipped with anti-static design between ball and housing.
- Face-to-face dimension according to EN 558, series 27.

Approval

- Fugitive emission certified in accordance with TA-Luft VDI 2440 / VDI 3479.
- Fugitive emission certified in accordance with ISO 15848-1 BH-CO1 and CH-CO3.
- Fire-safe approval in accordance with ISO 10497 and API 607, sixth edition.
- Safety integrity level IEC 61508 SIL 2.
- Declaration of conformity according to EC 1935/2004.

Options

- Equipped with worm gearbox and pneumatic, electric or hydraulic actuators.
- Position feedback for manually actuated or automated valves.
- Available with seats in TF4215.
- Stainless steel extended spindle type 8007 for insulation.

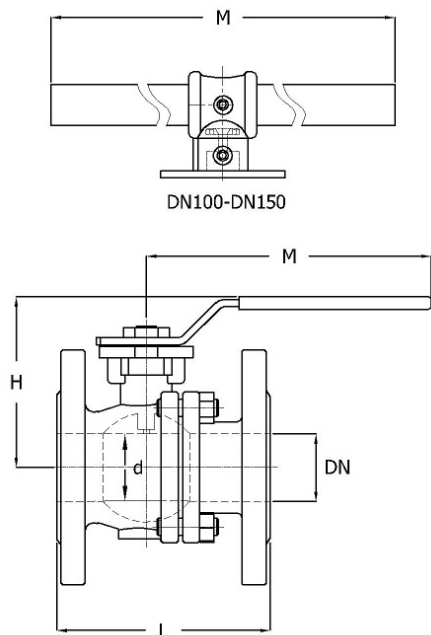

Size table:

DN	Pressure class	d	L	H	M	Weight
		mm	mm	mm	mm	kg
DN15	PN40	15	115	79	145	2.4
DN20	PN40	20	120	84	145	3.2
DN25	PN40	25	125	91	175	4.5
DN40	PN40	38	140	111	194	6.9
DN50	PN40	50	150	120	194	9.5
DN65	PN16	63.5	170	150	265	13.8
DN80	PN40	76	180	160	265	17.8
DN100	PN16	100	190	182	400	30.5
DN100	PN40	100	190	182	400	30.5
DN150	PN16	150	350	280	800	73.8
DN150	PN40	150	350	280	800	73.8

Pressure and temperature range							
DN	Pressure rating	-29	50	100	150	200	[°C]
DN15-DN200	PN16	16	15	13	13	11	[bar]
DN15-DN50	PN40	39	37	33	30	19	[bar]
DN65-DN100	PN40	39	37	33	28	16	[bar]
DN125-DN200	PN40	30	28	25	19	12	[bar]

Nominal inner diameter	Pressure rating	Face to Face norm	Manual operation	Mounting flange	Mounting flange 2	Bore	With locking device	Actuator material	Maximum operating pressure bar	Article
DN15	PN40	EN 558, Series 27	Handle	F03	F04	Full bore	Yes	1.4301	40	EC728910015-RP4L
DN20	PN40	EN 558, Series 27	Handle	F03	F04	Full bore	Yes	1.4301	40	EC728910020-RP4L
DN25	PN40	EN 558, Series 27	Handle	F04	F05	Full bore	Yes	1.4301	40	EC728910025-RP4L
DN40	PN40	EN 558, Series 27	Handle	F05	F07	Full bore	Yes	1.4301	40	EC728910040-RP4L
DN50	PN40	EN 558, Series 27	Handle	F05	F07	Full bore	Yes	1.4301	40	EC728910050-RP4L
DN65	PN16	EN 558, Series 27	Handle	F07	F10	Full bore	Yes	1.4301	16	EC728910065-RP6L
DN80	PN40	EN 558, Series 27	Handle	F07	F10	Full bore	Yes	1.4301	40	EC728910080-RP4L
DN100	PN16	EN 558, Series 27	T-wrench	F10		Full bore	No	Steel, galvanized	16	EC728910100-RP6L
DN100	PN40	EN 558, Series 27	T-wrench	F10		Full bore	No	Steel, galvanized	40	EC728910100-RP4L
DN150	PN16	EN 558, Series 27	T-wrench	F12		Full bore	No	Steel, galvanized	16	EC728910150-RP6L
DN150	PN40	EN 558, Series 27	T-wrench	F12		Full bore	No	Steel, galvanized	40	EC728910150-RP4L

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.