




## ECON® Needle valve Type: 229 Stainless steel Straight T-bar External thread (BSPP)

### Characteristics

**Type:** 229  
**Norm:** EN (DIN)  
**Construction type:** Straight  
**Housing material:** Stainless steel  
**Material quality:** 1.4401  
**Connection:** External thread (BSPP)  
**Face to Face norm:** Manufacturer standard  
**Operation:** T-bar  
**Rotating needle:** Yes  
**Spindle material:** 1.4401

### Characteristics (2)

**Primary spindle seal material:** PTFE  
**Actuator material:** 1.4305  
**Minimum medium temperature (continuous):** -10 °C  
**Maximum medium temperature (continuous):** 180 °C  
**Maximum pressure difference at 20 °C:** 400 bar

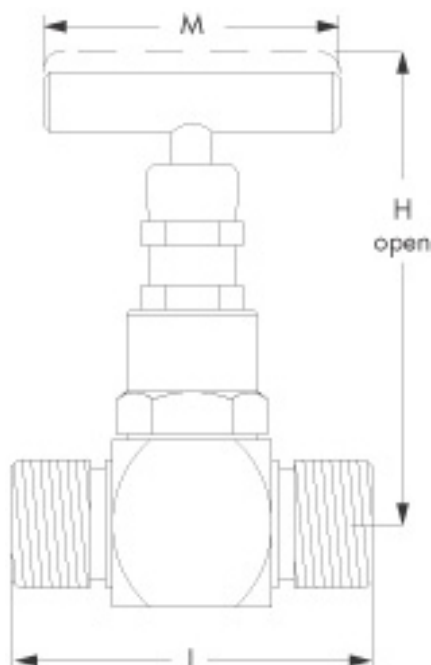

### Size table:

DN	d	L	H	M	Weight
	mm	mm	mm	mm	kg
1/2"	6	60	80	50	0.3

Nominal inner diameter	Pressure rating	Face to Face length	Valve bore	Kv value	Article
		mm	mm	m <sup>3</sup> /h	
1/2" [15]	PN400	60	6	1.55	EC0022901/2GD25

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.