



HAVIT SAE butt weld flange schedule 40 AFS


Supplied without bolt set and O-ring.

Characteristics

Series: AFS

Flange type: SAE butt weld flange

Material: Steel

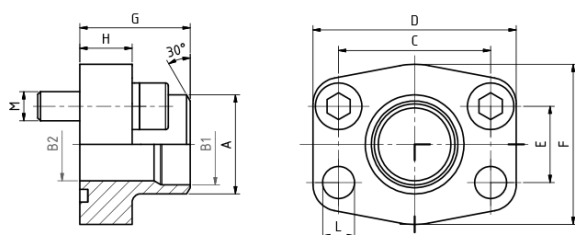

Size table:

Pressure class	SAE flange size	A	B1	B2	C	D	E	F	G
psi	in	mm	mm	mm	mm	mm	mm	mm	mm
3000	1/2	21.5	15.7	13	38.1	54	17.5	46	36
3000	3/4	28	20.9	19	47.6	65	22.3	50	36
3000	1	34	26.6	25	52.4	70	26.2	55	38
3000	1.1/4	42.8	35	32	58.7	79	30.2	68	41
3000	1.1/2	48.6	40.9	38	69.9	93	35.7	78	44
3000	2	61	52.5	51	77.8	102	42.9	90	45
3000	2.1/2	73	62.8		88.9	114	50.8	105	50
3000	3	92	77.9	73	106.4	134	61.9	124	50
3000	3.1/2	103	90.1	89	120.7	152	69.9	136	48
3000	4	115.5	102.3	99	130.2	162	77.8	146	48
3000	5	142	128.1	120	152.4	184	92.1	180	50

Pressure class	SAE flange size	Pipe size	Surface protection	Max. operation pressure	Article
psi	in	mm		bar	
3000	1/2	21.3 x 2.8	Untreated	350	14306567
3000	3/4	26.7 x 2.9	Untreated	350	14306675
3000	1	33.4 x 3.4	Untreated	320	14306757
3000	1.1/4	42.4 x 3.6	Untreated	280	14306856
3000	1.1/2	48.3 x 3.7	Untreated	210	14306970
3000	2	60.3 x 3.9	Untreated	210	14307094
3000	2.1/2	73 x 5.1	Untreated	175	14307197
3000	3	88.9 x 5.5	Untreated	160	14307305
3000	3.1/2	101.6 x 5.7	Untreated	35	14307360
3000	4	114.3 x 6	Untreated	35	14307421
3000	5	141.3 x 6.6	Untreated	35	14307472

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.