


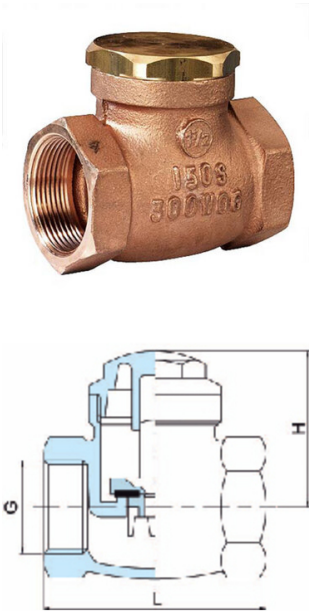

Check valve Type: 614 Bronze Internal thread (BSPP) PN25

Characteristics

- Type: 614
- Norm: EN (DIN)
- Construction type: Straight
- Housing material: Bronze
- Material quality: ASTM B62
- Connection: Internal thread (BSPP)
- Face to Face norm: Manufacturer standard
- Maximum pressure difference at 20 °C: 25 bar

Nominal inner diameter	Pressure rating	Face to Face length	Valve shape	Sealing	Material disc	Material cover	Material cover gasket	Minimum medium temperature (continuous)	Maximum medium temperature (continuous)	Article
		mm						°C	°C	
1/2" [15]	PN25	55	Flap	PTFE	CW614N	CW614N	Fiber Gasket	-10	120	10050362
3/4" [20]	PN25	62	Flap	PTFE	CW614N	CW614N	Fiber Gasket	-10	120	10050363
1" [25]	PN25	74	Flap	PTFE	CW614N	CW614N	Fiber Gasket	-10	120	10050360
1.1/4" [32]	PN25	90	Flap	PTFE	CW614N	CW614N	Fiber Gasket	-10	120	10050365
1.1/2" [40]	PN25	100	Flap	PTFE	CW614N	CW614N	Fiber Gasket	-10	120	10050364
2" [50]	PN25	128	Flap	PTFE	CW614N	ASTM B62	Fiber Gasket	-10	120	10050361

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.